

## Smart Air Conditioning Controller

Product Configuration

## INSTRUCTION





- ① Indicator light (blue) 3 Mode switch (10 seconds reset) Power on/off
- Temperature + the child lock)

Fan speed adjustment (press 10 seconds to start / disarm)

- Temperature-
- Ø Wi-Fi signal

ė

- 8 Fan speed display
- 0 Mode display Ambient temperature
- Air conditioning temperature Ambient humidity
- (3) Ash removal tips Child lock
- DC 5V wiring for power supply Hanging hole

6

Back bracket

 Prepare for a power converter
Pass the output through the small round hole in the

1-1 Mounting plate installation 1. Hanging on the wall Installation

and connect to home

electricity

mounting plate

installation diagram

Finished Mounting plate

 Connect the output into the uish between positive and device (Pay attention to disting negative poles)



Standby current: 25mA Working current: 550mA

Display screen: LCD controllable backlight screen

Maximum wireless range: 45m Wi-Fi standard: IEEE 802.11b/g/ Wi-Fi type: 2.4GHz Power Interface: Type-c USB; Power supply: DC 5V / 1A Specifications

DC 5V wiring for power supply



Fix the mounting plate with

• Finish!

Screws























Duration of screen lighting up: 60s Operating temperature: -0°C ~50°C (32°F ~122°F

Remote control distance: 7M Bluetooth version: Bluetooth 5.0

Product size: 88mm x 88mm x 16mm Operating humidity: 0~90%RH (no condensation) Detection accuracy: temperature: 0.3 humidity:5%RH Humidity detection range: 0~95%RH (no condensation)

Temperature detection range; 0 ℃ ~50 ℃ (32°F ~122°F Temperature control range: 16 ℃ ~30 ℃



3-1-1 Smart Wi-Fi Mode

-2 Device installation

quickly, then follow the APP prompts to add. Press the reset button until the indicator light blink





slowly, then follow the APP prompts to add.

3-1-2 AP compatible Mode



The state of the s	will bob up autoillatica
101	cally.



i-2-2 Bluetooth network (Add Manually)	0 0 0 0	
ually)		

If it does not automatically pop up, you can add the

# device by following the steps below.

enter Wi-Fi Mode

Choosing our WiFi Smart Home Sensors Fast flashing: 2 times/second LED State Slow flashing: 2 seconds/time Long press the MODE key for 10 2. The Bluetooth distribution networ 1. The indicator color is blue; can be used in any inclusion mode 4 to your mobile. 2-3 Login if you have an account already. 2-1 Launch the "Smart life" app 2. Register and Login from APP Store or Google Play Download the "Smart life" app Get Started 1. Download APP 

LED State


AP Compatibility Device Status Smart Wi-Fi mode

Reset/Switch to Remarks inclusion mode

- 2-2 To register, enter your mobile phone number or email
- address, create a password, then login to the app.

- 3-1 Wi-Fi Mode(Default)
- If you have not turned on the Bluetooth function of
- your phone, please add devices manually.
- Select the "+" symbol on the top right-hand corner.
- Click "Add Device" Add Manually "Plug(BLE+Wi-Fi)" All Wi-Fi products can be added with any Wi-Fi option and the device only supports 2,4GHz Wi-Fi signals.

### If the indicator light is off, please press and hold the reset status of the indicator light. button for 6 seconds, then add the device according to the

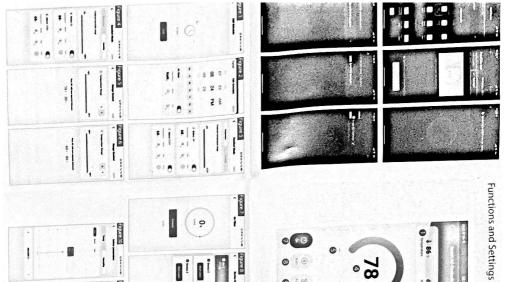

4-11-1 Share Device 4-11 Device Setting


4-11-2 Remove Device

the device again to clear the historical record Clear records; Delete the device through the APP and add

-

Smart AC Controlor State of Administra

E. ....

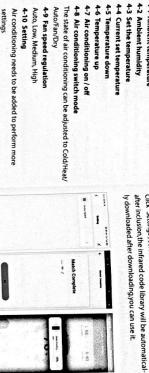

6 61 O

4-6 Temperature up 4-5 Temperature down

4-9 Fan speed regulation

Auto/Fan/Dry

4-10 Setting Auto, Low, Medium, High 4-3 Set the temperature 4-2 Ambient humidity 4-1 Ambient temperature

4 Working Status, Record and Settings

Click "Settings", select the brand of air conditioning to add,

Bullet.

4-10-1 Edit Schedule (Figure 1, 2)

O lide Schedule


Add air conditioning










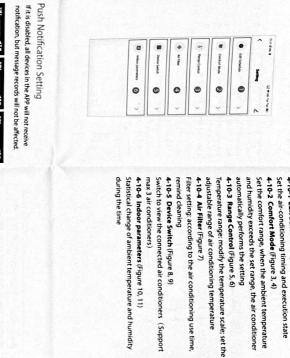



Make Your Home Smarter

Figure 11 . . 1

1

A Personal

Party other than communication Discount

# 3 4

-

Due to the app update, the above interface is for reference only