



ETSI EN 300 328 RADIO TEST REPORT

On Behalf of

SHENZHEN WALE GROUP CO., LTD

WiFi Temperature Humidity Sensor

Model No.: TH02

Prepared for : SHENZHEN WALE GROUP CO., LTD
Address : 5/F, BLDG2, NO.5, TIANHUA ROAD, XINXIA AVENUE PINGHU,
 LONGGANG, SHENZHEN

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
 518103, Shenzhen, Guangdong, China

Report Number : A2206159-C01-R05
Date of Receipt : July 13, 2022
Date of Test : July 13, 2022– July 29 2022
Date of Report : July 29, 2022
Version Number : V0

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. General Information	6
1.1. Description of Device (EUT)	6
1.2. Categorization.....	10
1.3. Accessories of device (EUT)	10
1.4. Ancillary equipment Details	10
1.5. Test Lab information	10
2. Summary of test	11
2.1. Test Standard description:	11
2.2. Summary of test result.....	11
2.3. Block Diagram of Configuration for test.....	12
2.4. Test mode	12
2.5. Test Conditions	12
2.6. Measurement Uncertainty (95% confidence levels, k=2)	12
2.7. Test Equipment.....	13
3. RF output power.....	14
3.1. Limit	14
3.2. Test Setup.....	14
3.3. Test Procedure.....	14
3.4. Test Result.....	15
4. Power Spectral Density	17
4.1. Limit	17
4.2. Test Setup.....	17
4.3. Test Procedure.....	17
4.4. Test Result	17
5. Adaptivity.....	23
5.1. Limit	23
5.2. Test Setup.....	23
5.3. Test Procedure.....	24
5.4. Test Result	25
6. Occupied Channel Bandwidth.....	39
6.1. Limit	39
6.2. Test Setup.....	39
6.3. Test Procedure.....	39
6.4. Test Result	40
7. Transmitter unwanted emissions in the out-of-band domain	46
7.1. Limit	46
7.2. Test Setup.....	46
7.3. Test Procedure.....	46
7.4. Test Result	47
8. Transmitter unwanted emissions in the spurious domain	54
8.1. Limit	54
8.2. Test Procedure.....	54
8.3. Test Result	54
9. Receiver Spurious emissions	56
9.1. Limit	56
9.2. Test Procedure.....	56
9.3. Test Result	56
10. Receiver Blocking	57
10.1. Limit	57
10.2. Test Setup	58
10.3. Test Procedure.....	58
10.4. Test Result	59
11. Geo-location capability.....	60
11.1. Definition	60

11.2.	Requirements.....	60
11.3.	Test Result	60
12.	Photos of test setup.....	61
13.	Photos of EUT.....	62

TEST REPORT DECLARATION

Applicant : SHENZHEN WALE GROUP CO., LTD
Address : 5/F, BLDG2, NO.5, TIANHUA ROAD, XINXIA AVENUE PINGHU, LONGGANG, SHENZHEN
Manufacturer : SHENZHEN WALE GROUP CO., LTD
Address : 5/F, BLDG2, NO.5, TIANHUA ROAD, XINXIA AVENUE PINGHU, LONGGANG, SHENZHEN
EUT Description : WiFi Temperature Humidity Sensor
(A) Model No. : TH02
(B) Trademark : N/A

Measurement Standard Used:

ETSI EN 300 328 V2.2.2:2019

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. The measurement results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 300 328 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer

Yannis



Approved by (name + signature).....:

Jack Xu
Project Manager

Jack

Date of issue.....

July 29, 2022

Revision History

Revision	Issue Date	Revisions	Revised By
V0	July 29, 2022	Initial released Issue	Yannis Wen

1. General Information

1.1. Description of Device (EUT)

EUT Name	: WiFi Temperature Humidity Sensor
Trademark	: N/A
Model No.	: TH02
DIFF.	: N/A
Power supply	DC 3V from battery
2.4G WIFI	:
Operation frequency	: 2412MHz-2472MHz for IEEE 802.11 b, g, n/HT20
Channel No.	: 802.11b/802.11g /802.11n(HT20): 13CH
Modulation type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	: Internal antenna, Maximum Gain is 1dBi
	:
Software version	: V1.0
Hardware version	: 94V-0
Intend use environment	: Residential, commercial and light industrial environment

a) The type of modulation used by the equipment:

- FHSS
- other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:
 - The number of Hopping Frequencies:
- In case of Adaptive Frequency Hopping Equipment:
 - The maximum number of Hopping Frequencies:
 - The minimum number of Hopping Frequencies:
 - The Dwell Time:
 - The Minimum Channel Occupation Time:

c) Adaptive / non-adaptive equipment:

- non-adaptive Equipment
- adaptive Equipment without the possibility to switch to a non-adaptive mode
- adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

- The Channel Occupancy Time implemented by the equipment:
- The equipment has implemented an LBT based DAA mechanism
 - In case of equipment using modulation different from FHSS:
 - The equipment is Frame Based equipment
 - The equipment is Load Based equipment
 - The equipment can switch dynamically between Frame Based and Load Based equipment
 - The CCA time implemented by the equipment: μ s
 - The value q as referred to in clause 4.3.2.5.2.2
- The equipment has implemented an non-LBT based DAA mechanism
- The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

- The maximum RF Output Power (e.i.r.p.):
- The maximum (corresponding) Duty Cycle: %
- Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power
DSSS
- Power Spectral Density
DSSS
- Duty cycle, TxSequence, Tx-gap
DSSS: Duty cycle 99%
- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)
- Hopping Frequency Separation (only for FHSS equipment)
- Medium Utilisation
-
- Adaptivity & Receiver Blocking
-
- Occupied Channel Bandwidth
DSSS
- Transmitter unwanted emissions in the OOB domain
DSSS
- Transmitter unwanted emissions in the spurious domain
DSSS

- Receiver spurious emissions
DSSS

g) The different transmit operating modes (tick all that apply):

- Operating mode 1: Single Antenna Equipment
 - Equipment with only 1 antenna
 - Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
 - Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
- Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
 - Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

- Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
 - Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:
- The number of Transmit chains:
- symmetrical power distribution
- asymmetrical power distribution

In case of beam forming, the maximum beam forming gain:

NOTE: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2412 MHz to 2472 MHz
- Operating Frequency Range 2: MHz to MHz
- NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

- Occupied Channel Bandwidth :.....
- Occupied Channel Bandwidth 2:
- NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- Stand-alone
- Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- Plug-in radio device (Equipment intended for a variety of host systems)
- Other

l) The extreme operating conditions that apply to the equipment:

Operating temperature range:

Operating voltage range: AC ■ DC

Details provided are for the: ■ stand-alone equipment

- combined (or host) equipment
- test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

- Antenna Type
 - Internal antenna
- Antenna Gain: 1dBi
- If applicable, additional beamforming gain (excluding basic antenna gain):

dB

- Temporary RF connector provided
- No temporary RF connector provided
- Dedicated Antennas (equipment with antenna connector)
 - Single power level with corresponding antenna(s)
 - Multiple power settings and corresponding antenna(s)
 - Number of different Power Levels:
 - Power Level 1: dBm
 - Power Level 2: dBm
 - Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ■stand-alone equipment

- combined (or host) equipment
- test jig

Supply Voltage AC mains State AC voltage

DC State DC voltage : V

In case of DC, indicate the type of power source

- Internal Power Supply
- External Power Supply or AC/DC adapter
- Battery:7.4V..
- Other:

o) Describe the test modes available which can facilitate testing:

The EUT can be into the Engineer mode for testing

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):

WiFi

q) If applicable, the statistical analysis referred to in clause 5.4.1 q)

Not apply

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)

Not apply

s) Geo-location capability supported by the equipment:

Yes

The geographical location determined by the equipment as defined in clause 4.3.1.13.2

or

clause 4.3.2.12.2 is not accessible to the user

■No

t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):

The minimum performance criterion shall be a PER less than or equal to 10 %.

The intended use of the equipment should be in the normal operation without lost the communication link or no unintentionally operation occurs.

1.2. Categorization

■ Receiver category 1

Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

□ Receiver category 2

Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.

□ Receiver category 3

Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.

1.3. Accessories of device (EUT)

Accessories1	: AC Adapter
Manufacturer	: Yisheng Electronics Co., Ltd.
Model	: EA1012AVRU-050
Ratings	: Input: AC 100-240V, 1.0A, 50-60Hz : Output: DC 5V,2.4A

1.4. Ancillary equipment Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	Notebook PC	DELL	Latitude 3490	--	SDOC

1.5. Test Lab information

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

2. Summary of test

2.1. Test Standard description:

ETSI EN 300 328 V2.2.2:2019: Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonised Standard for access to radio spectrum

2.2. Summary of test result

Technical requirements for the equipment using wide band modulations other than FHSS:

The following essential requirements and test specifications are relevant to the presumption of conformity under Article 3.2 of Directive 2014/53/EU			
No	Test Parameter	Clause No	Results
Transmitter Parameters			
1	RF output power	4.3.2.2	PASS
2	Power Spectral Density	4.3.2.3	PASS
3	Duty Cycle, Tx-sequence, Tx-gap	4.3.2.4	N/A
4	Accumulated Transmit time, Frequency Occupation & Hopping Sequence	4.3.1.4	N/A
5	Hopping Frequency Separation	4.3.1.5	N/A
6	Medium Utilisation (MU) factor	4.3.2.5	N/A
7	Adaptivity	4.3.2.6	PASS
8	Occupied Channel Bandwidth	4.3.2.7	PASS
9	Transmitter unwanted emissions in the OOB domain	4.3.2.8	PASS
10	Transmitter unwanted emissions in the spurious domain	4.3.2.9	PASS
11	Receiver spurious emissions	4.3.2.10	PASS
Receiver Parameters			
12	Receiver Blocking	4.3.2.11	PASS
13	Geo-location capability	4.3.2.12	N/A
Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.			

2.3. Block Diagram of Configuration for test



2.4. Test mode

The special RF test software was used to control EUT work in Continuous WIFI TX mode, and select test channel, wireless mode.

Mode	data rate (Mbps)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH7	2442
	1	High: CH13	2472
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH7	2442
	6	High: CH13	2472
IEEE 802.11n HT20	6.5	Low :CH1	2412
	6.5	Middle: CH7	2442
	6.5	High: CH13	2472

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Test Conditions

	Normal Conditions	Extreme Conditions
Temperature range	15-35°C	-40°C and 65°C
Humidity range	20-75%	20-75%
Pressure range	86-106kPa	86-106kPa
Power supply	DC 7.4V	6.1V and 8.3V (declared by the manufacturer.)

Note 1: The test procedure described in clause 5.1 of EN300 328 was used for extreme test procedure.
 2: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Conducted Emission Test	1.63dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74 dB	Polarize: V
	3.76 dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77 dB	Polarize: H
	3.80 dB	Polarize: V
Uncertainty for radio frequency	5.06×10^{-8} GHz	
Uncertainty for conducted RF Power	0.40dB	

2.7. Test Equipment

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last cal.	Cal. Due day
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2021.08.25	2022.08.24
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2021.08.25	2022.08.24
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2021.08.30	2023.08.29
Filter	KANGMAI	ZLPF-LDC-100 0-1959	/	1209002075	2021.08.25	2022.08.24
Filter	WAINWRIGHT	WHKX2.80 /18G-12SS	/	SN1	2021.08.25	2022.08.24
RF Cable	Resenberger	Cable 4	/	PE1	2021.08.25	2022.08.24
CMU200	ROHDE&SCHWARZ	CMU200	V5.21	116785	2021.08.25	2022.08.24
Signal Analyzer	Agilent	N9020A	A.14.16	MY499100060	2021.08.25	2022.08.24
vector Signal	Agilent	N5182A	/	MY49060042	2021.08.25	2022.08.24
vector Signal	Agilent	E4438C	/	US44271917	2021.08.25	2022.08.24
Amplifier	HP	HP8347A	/	2834A00455	2021.08.25	2022.08.24
Amplifier	Agilent	8449B	/	3008A02664	2021.08.25	2022.08.24
Filter	SKET	HPF_1-18G-55 dB	/	N/A	2021.08.25	2022.08.24
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03- 102082-Wa	2021.08.25	2022.08.24
Bilog Antenna	SCHWARZBECK	VULB 9168	/	9168-627	2021.08.30	2023.08.29
9*6*6 anechoic	CHENYU	9*6*6	/	N/A	2020.09.02	2022.09.01
RF Cable	Resenberger	Cable 1	/	RE1	2021.08.25	2022.08.24
RF Cable	Resenberger	Cable 2	/	RE2	2021.08.25	2022.08.24
RF Cable	Resenberger	Cable 3	/	CE1	2021.08.25	2022.08.24
Power Sensor	DARE	RPR3006W	/	15100041SNO 91	2021.08.25	2022.08.24
Power Sensor	DARE	RPR3006W	/	15100041SNO 92	2021.08.25	2022.08.24
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.22	1201.0002K50- 117239-SM	2021.08.25	2022.08.24
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2021.08.30	2023.08.29
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40 -880	/	100631	2022.04.22	2023.04.21
Adjustable	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information				
Test Item	Software Name	Manufacturer	Version	
RE	EZ-EMC	farad	Alpha-3A1	
CE	EZ-EMC	farad	Alpha-3A1	
RF-CE	MTS 8310	MWRFtest	2.0.0.0	

3. RF output power

3.1. Limit


The RF output power for non-FHSS equipment shall be equal to or less than 20 dBm.
 NOTE: For Non-adaptive FHSS equipment, the manufacturer may have declared a reduced RF Output Power (see clause 5.4.1 m)) and associated Duty Cycle (see clause 5.4.1 e)) that will ensure that the equipment meets the requirement for the Medium Utilization (MU) factor further described in clause 4.3.2.5. This is verified by the conformance test referred to in clause 4.3.2.5.4.

For non-adaptive non-FHSS equipment, where the manufacturer has declared an RF output power of less than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value.

This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20dBm

3.2. Test Setup

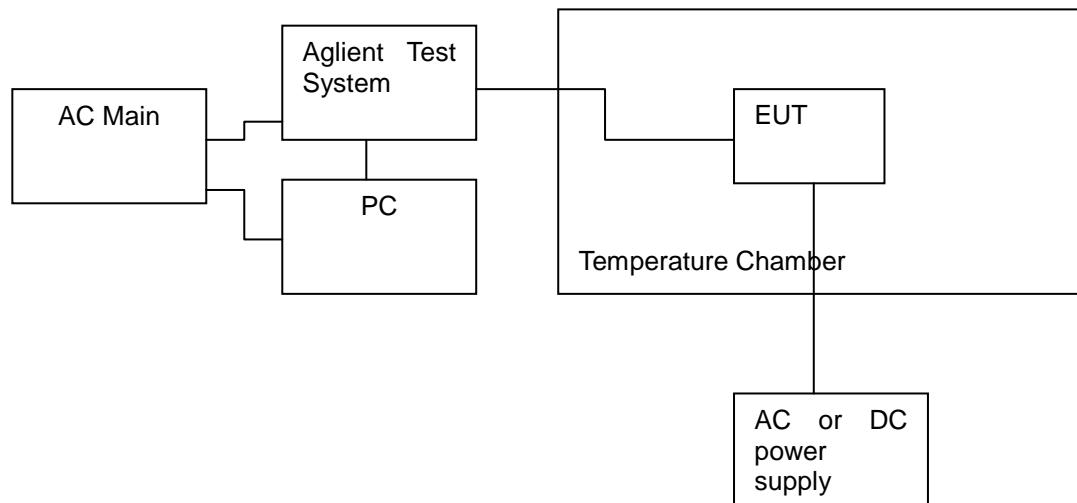

3.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.2.

3.4. Test Result

Test result						
Cable loss: 0.6dB			Antenna Gain: 1dBi			
Sample speed		1 MS/s for power sensor				
Number of Burst		At least 10				
Duty cycle X: 100%						
Mode	Condition	CH	Result	Limit		
			Total e.i.r.p (dBm)	e.i.r.p (dBm)		
11b	HVHT	CH1	13.3	20		
		CH7	13.3	20		
		CH13	13.43	20		
	HVLT	CH1	13.28	20		
		CH7	13.32	20		
		CH13	13.35	20		
	LVHT	CH1	13.27	20		
		CH7	13.31	20		
		CH13	13.38	20		
	LVLT	CH1	13.27	20		
		CH7	13.27	20		
		CH13	13.39	20		
11g	NVNT	CH1	13.64	20		
		CH7	13.62	20		
		CH13	13	20		
	HVHT	CH1	13.16	20		
		CH7	13.2	20		
		CH13	13.28	20		
	HVLT	CH1	13.15	20		
		CH7	13.2	20		
		CH13	13.28	20		
	LVHT	CH1	13.2	20		
		CH7	13.21	20		
		CH13	13.27	20		
	LVLT	CH1	13.27	20		
		CH7	13.29	20		
		CH13	13.35	20		
	NVNT	CH1	13.46	20		
		CH7	13.38	20		
		CH13	13.08	20		
Conclusion: PASS						

Test result						
Cable loss: 0.6dB			Antenna Gain:1dBi			
Sample speed		1 MS/s for power sensor				
Number of Burst		At least 10				
Duty cycle X: 100%						
Mode	Condition	CH	Result	Limit		
			Total e.i.r.p (dBm)	e.i.r.p (dBm)		
11n/HT20	HVHT	CH1	13.41	20		
		CH7	13.45	20		
		CH13	13.53	20		
	HVLT	CH1	13.42	20		
		CH7	13.44	20		
		CH13	13.53	20		
	LVHT	CH1	13.46	20		
		CH7	13.49	20		
		CH13	13.56	20		
	LVLT	CH1	13.54	20		
		CH7	13.55	20		
		CH13	13.6	20		
	NVNT	CH1	13.52	20		
		CH7	12.85	20		
		CH13	11.99	20		
Conclusion: PASS						


4. Power Spectral Density

4.1. Limit

The maximum Power Spectral Density for non-FHSS equipment is 10 dBm per MHz.

Limit
10dBm/MHz

4.2. Test Setup



4.3. Test Procedure



Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.3

Connect the UUT to the spectrum analyzer and use the following settings:

Frequency range	2400MHz-2483.5MHz
RBW/VBW	10KHz/30KHz
Sweep points/time	>8350 / 10S
Detector	RMS
Trace	Max hold

4.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	3.63	10	Pass
NVNT	b	2442	Ant1	2.19	10	Pass
NVNT	b	2472	Ant1	3.21	10	Pass
NVNT	g	2412	Ant1	1.88	10	Pass
NVNT	g	2442	Ant1	2.32	10	Pass
NVNT	g	2472	Ant1	2.52	10	Pass
NVNT	n20	2412	Ant1	2.38	10	Pass
NVNT	n20	2442	Ant1	1.55	10	Pass
NVNT	n20	2472	Ant1	0.83	10	Pass

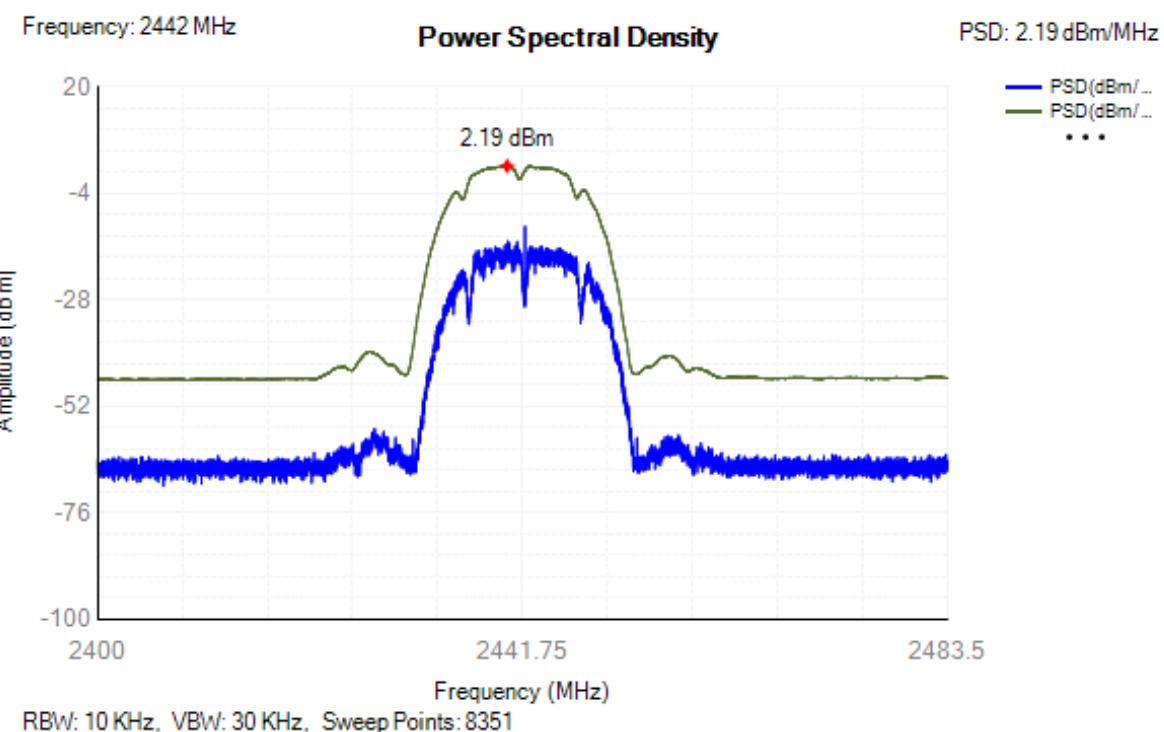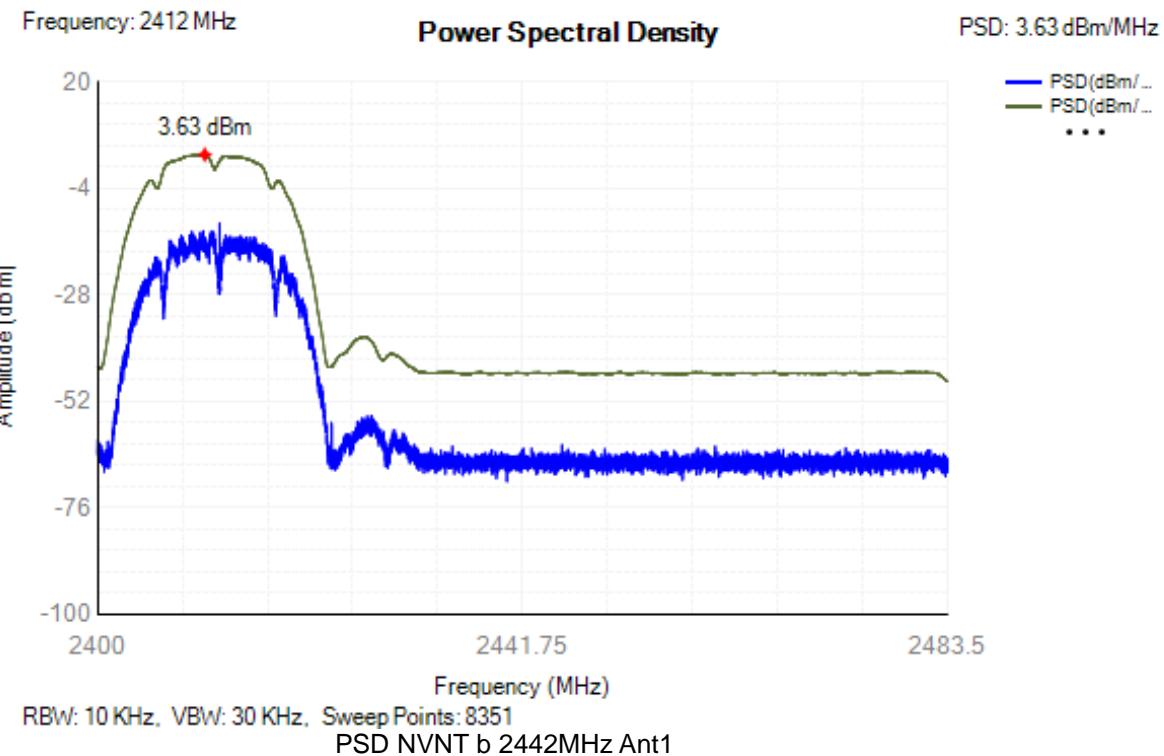
PSD NVNT b 2412MHz Ant1

PSD NVNT b 2472MHz Ant1

Frequency: 2472 MHz

Power Spectral Density

PSD: 3.21 dBm/MHz

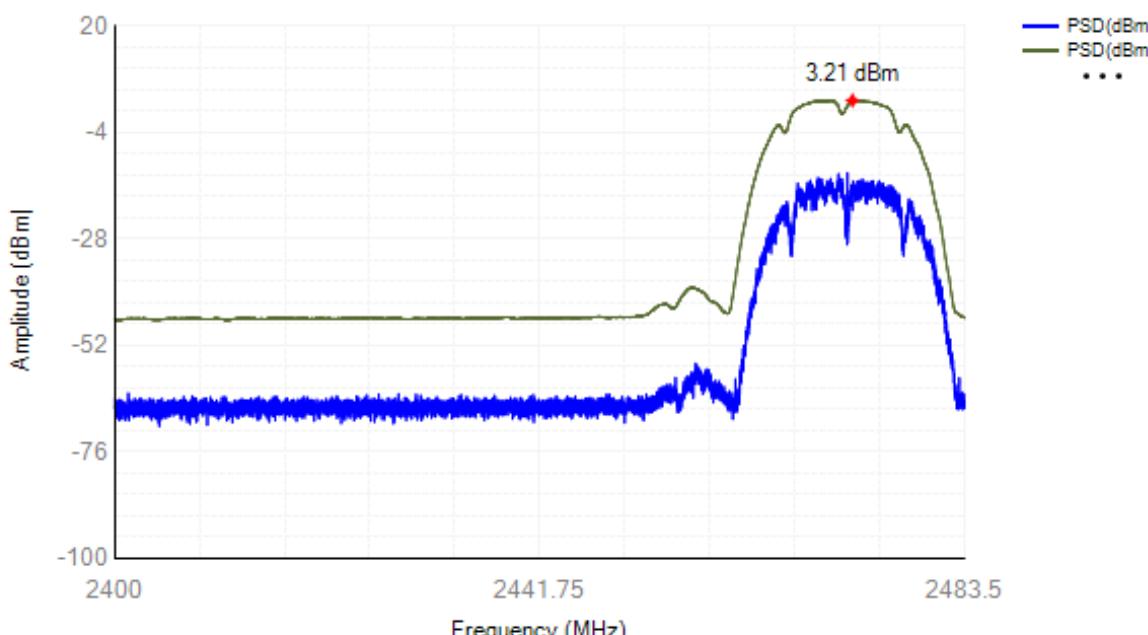


RBW: 10 KHz, VBW: 30 KHz, Sweep Points: 8351

PSD NVNT g 2412MHz Ant1

Frequency: 2412 MHz

Power Spectral Density

PSD: 1.88 dBm/MHz

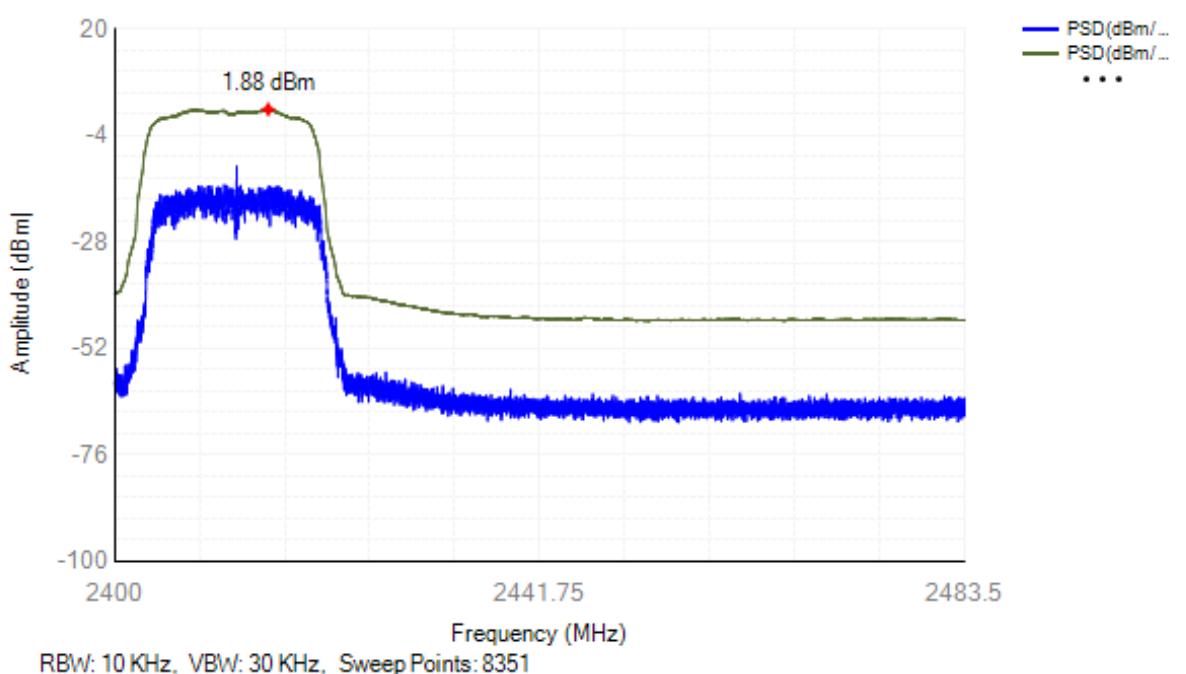


RBW: 10 KHz, VBW: 30 KHz, Sweep Points: 8351

PSD NVNT g 2442MHz Ant1

Frequency: 2442 MHz

Power Spectral Density

PSD: 2.32 dBm/MHz

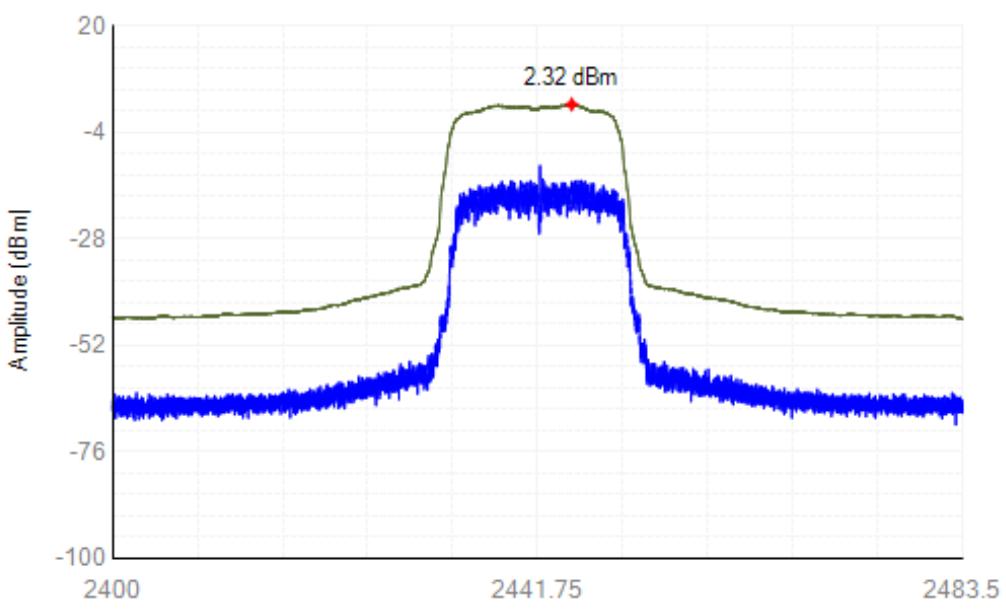


RBW: 10 KHz, VBW: 30 KHz, Sweep Points: 8351

PSD NVNT g 2472MHz Ant1

Frequency: 2472 MHz

Power Spectral Density

PSD: 2.52 dBm/MHz

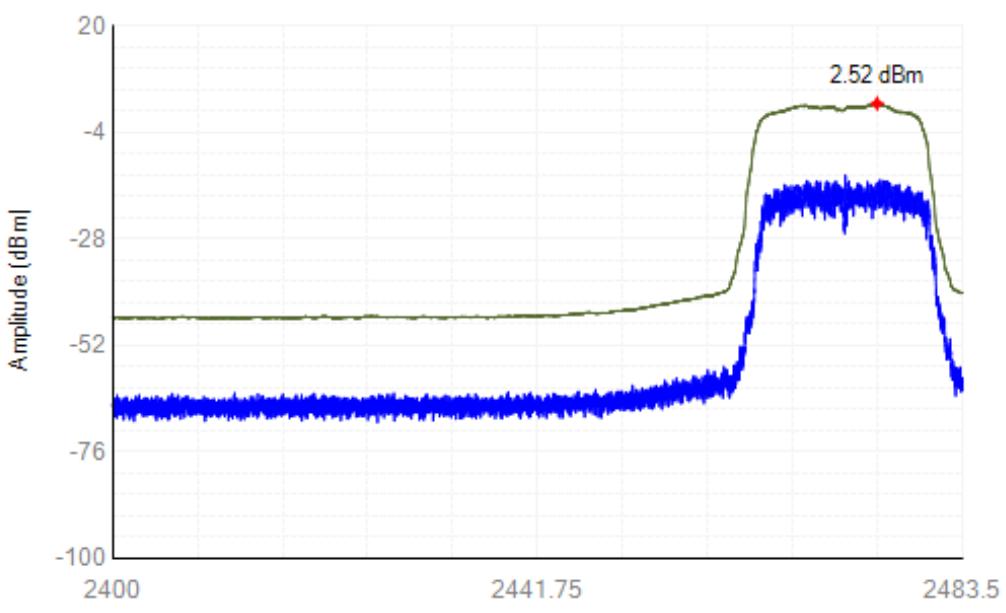


RBW: 10 KHz, VBW: 30 KHz, Sweep Points: 8351

PSD NVNT n20 2412MHz Ant1

Frequency: 2412 MHz

Power Spectral Density

PSD: 2.38 dBm/MHz

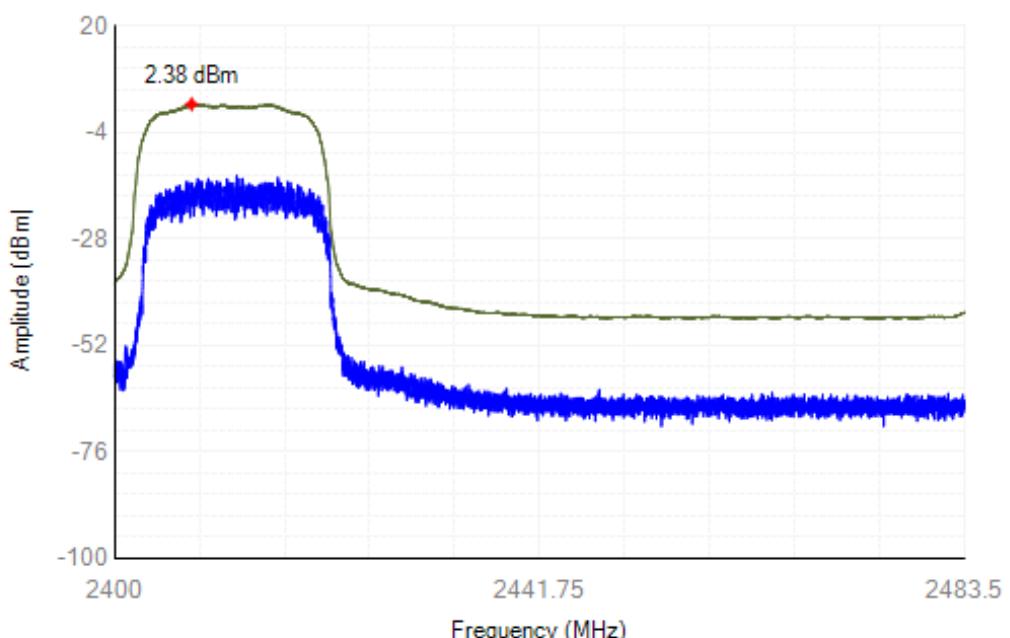


RBW: 10 KHz, VBW: 30 KHz, Sweep Points: 8351

PSD NVNT n20 2442MHz Ant1


Frequency: 2442 MHz

Power Spectral Density

PSD: 1.55 dBm/MHz

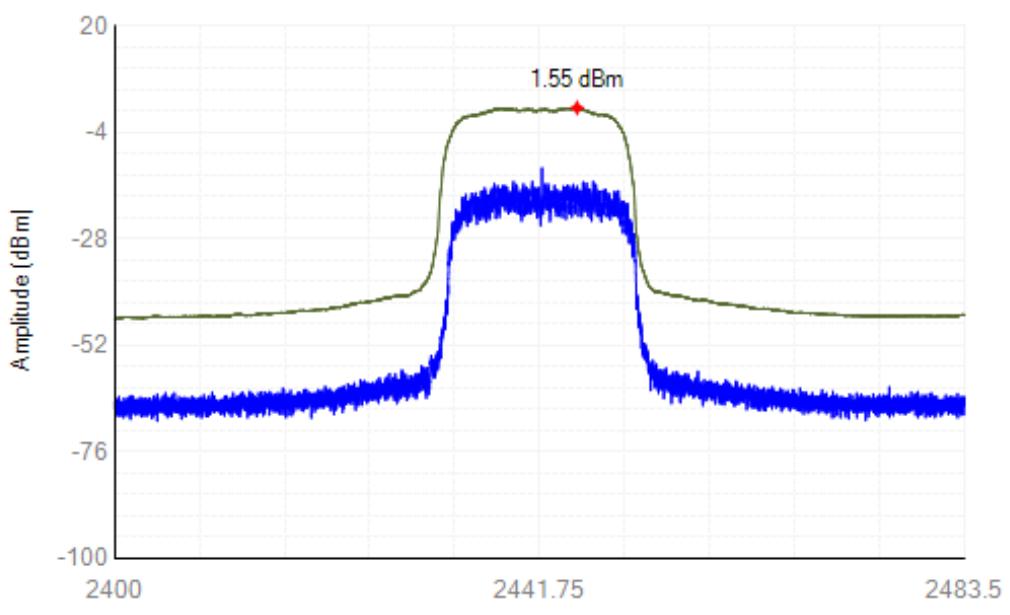

RBW: 10 KHz, VBW: 30 KHz, Sweep Points: 8351

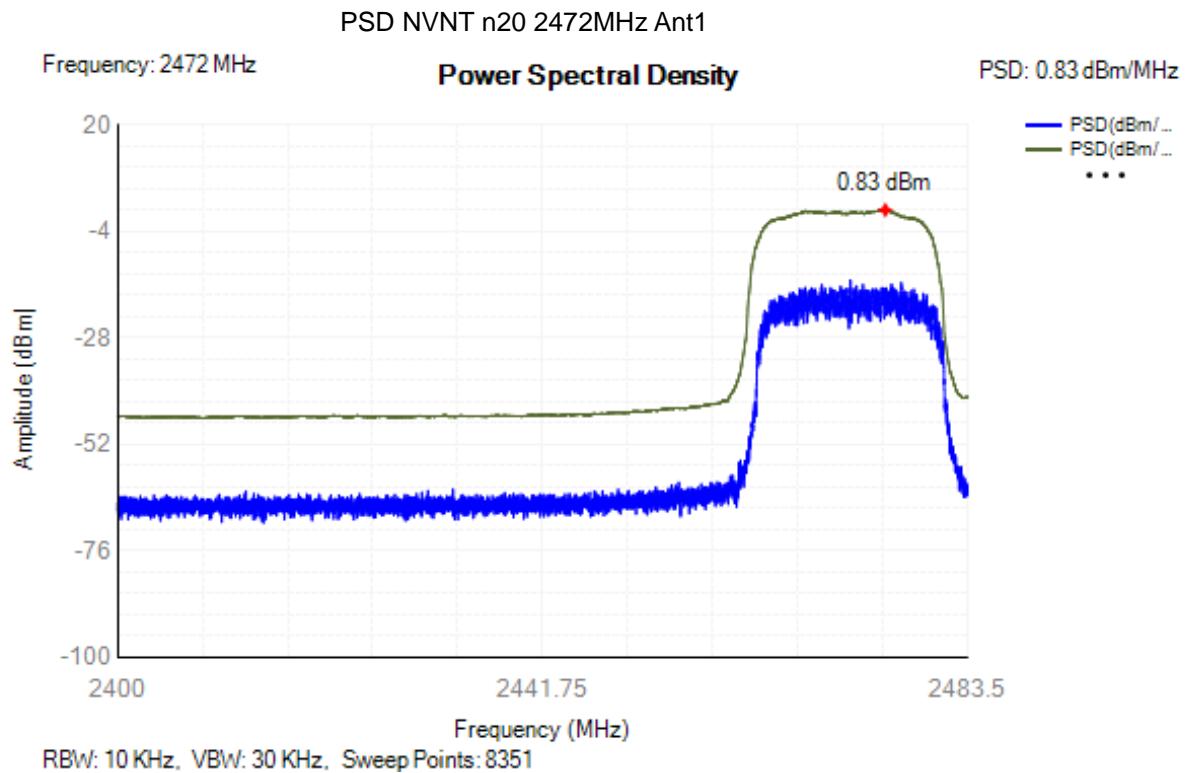

5. Adaptivity

5.1. Limit

The frequency range of the equipment is determined by the lowest and highest Non-LBT based Detect And Avoid:

- 1 The hopping frequency shall remain unavailable for a minimum time equal to 1 second or 5 times the actual number of hopping frequencies in the current (adapted) channel map used by the equipment, multiplied with the Channel Occupancy Time whichever is greater. There shall be no transmissions during this silent period on this hopping frequency. After this, the hopping frequency may be considered again as an 'available' frequency.;
- 2 COT < 40 ms;
- 3 Idle Period = 5% of COT \geq 100us;
- 4 Detection threshold level = $-70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / \text{Pout})$ (Pout in mW e.i.r.p.);


LBT based Detect And Avoid (Frame Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 18 us;
- 2 CCA observation time declared by the supplier;
- 3 COT < 60 ms;
- 4 Idle Period = 5% of COT \geq 100us;
- 5 Detection threshold level = $-70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / \text{Pout})$ (Pout in mW e.i.r.p.);

Short Control Signalling Transmissions:

Short Control Signalling Transmissions shall have a maximum TxOn / (TxOn + TxOff) ratio of 10% within an observation period of 50ms or within an observation period equal to the dwell time, whichever is less.

5.2. Test Setup

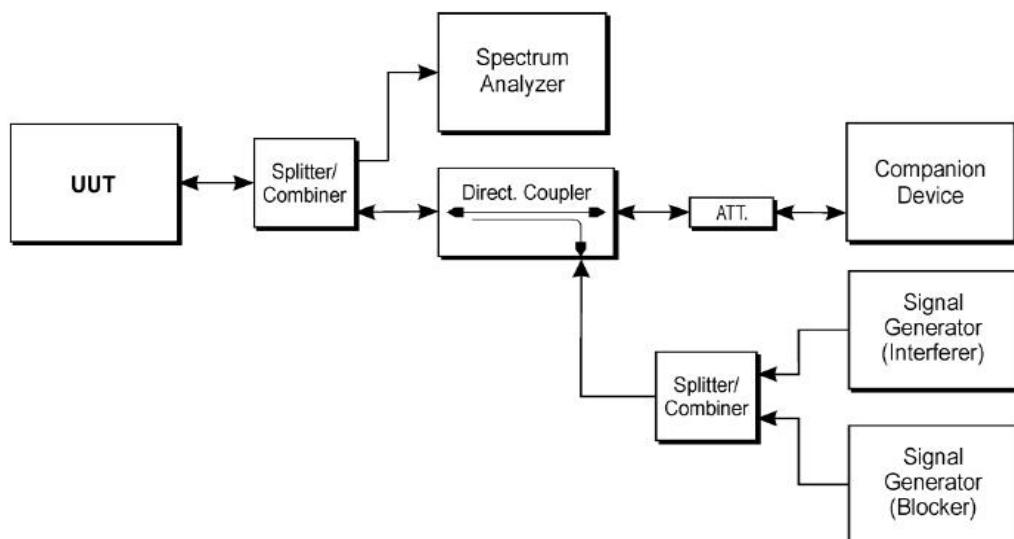

5.3. Test Procedure


Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.6.

5.4. Test Result


Adaptivity

Condition	Mode	Frequency (MHz)	Antenna	AWGN Level (dBm)	CW Level (dBm)	Short Control Width (ms)	Short Control Ratio(%)	Limit (%)	Verdict
NVNT	b	2412	Ant1	-60	-35	0	0	<=10	Pass
NVNT	b	2472	Ant1	-60	-35	0	0	<=10	Pass
NVNT	g	2412	Ant1	-60	-35	0	0	<=10	Pass
NVNT	g	2472	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n20	2412	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n20	2472	Ant1	-60	-35	0	0	<=10	Pass


Adaptivity NVNT b 2412MHz

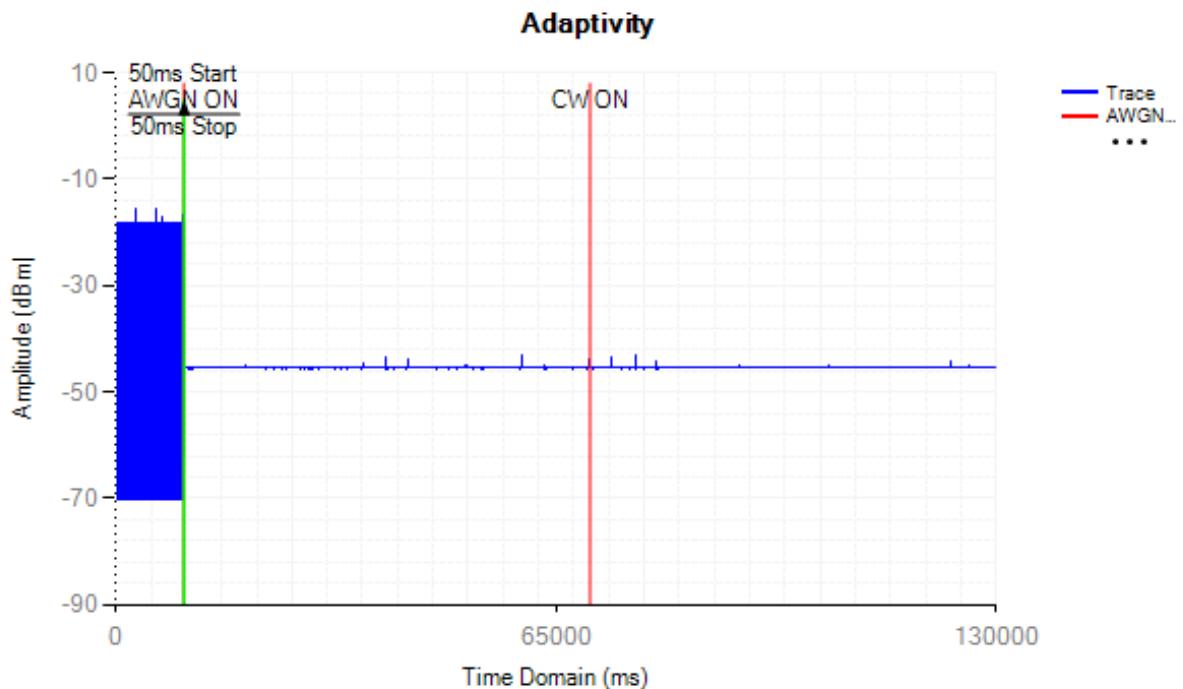


Control Signal NVNT b 2412MHz

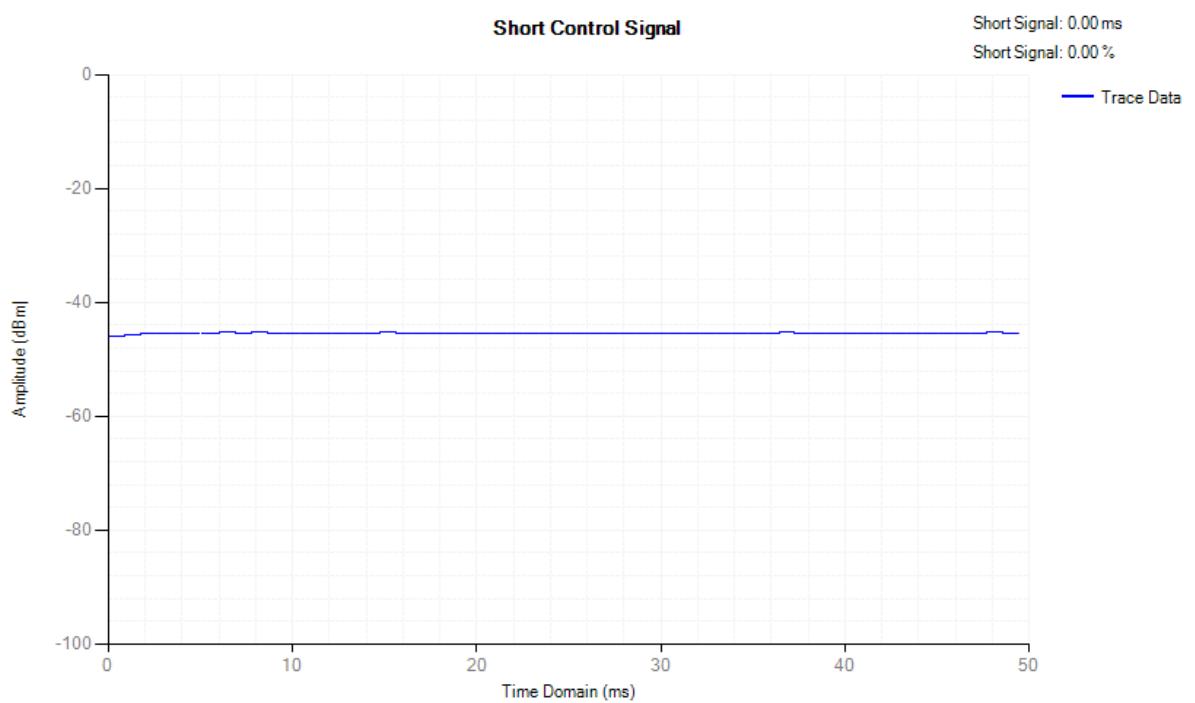


Adaptivity NVNT b 2472MHz

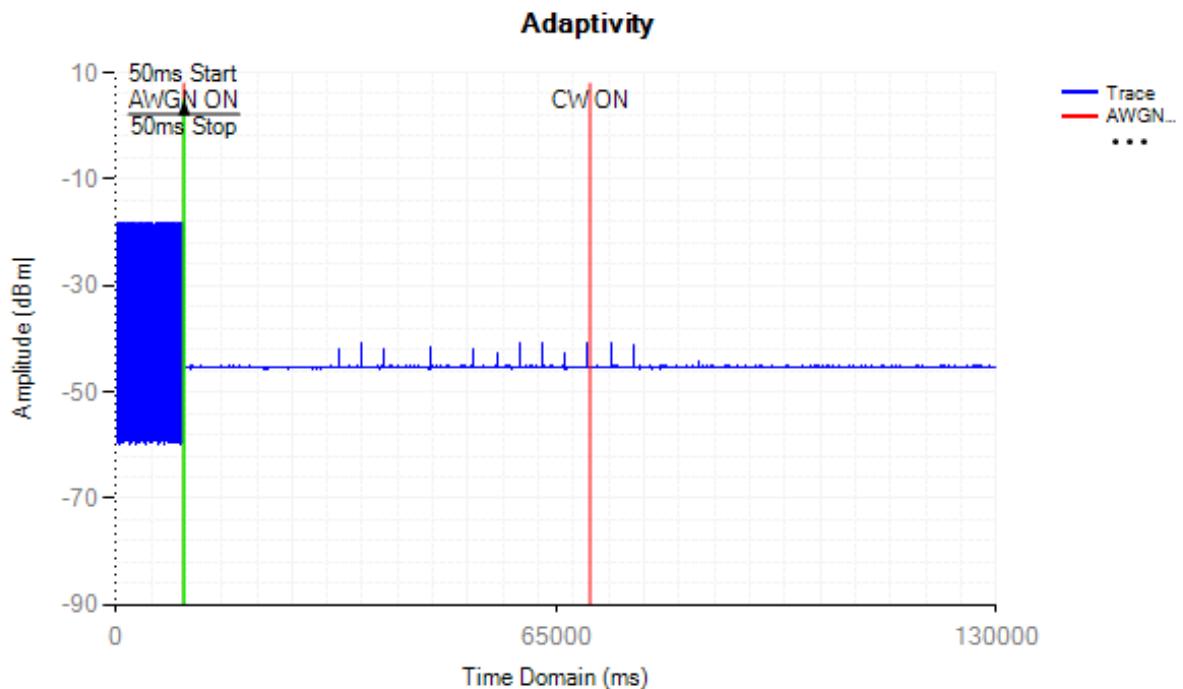


Control Signal NVNT b 2472MHz

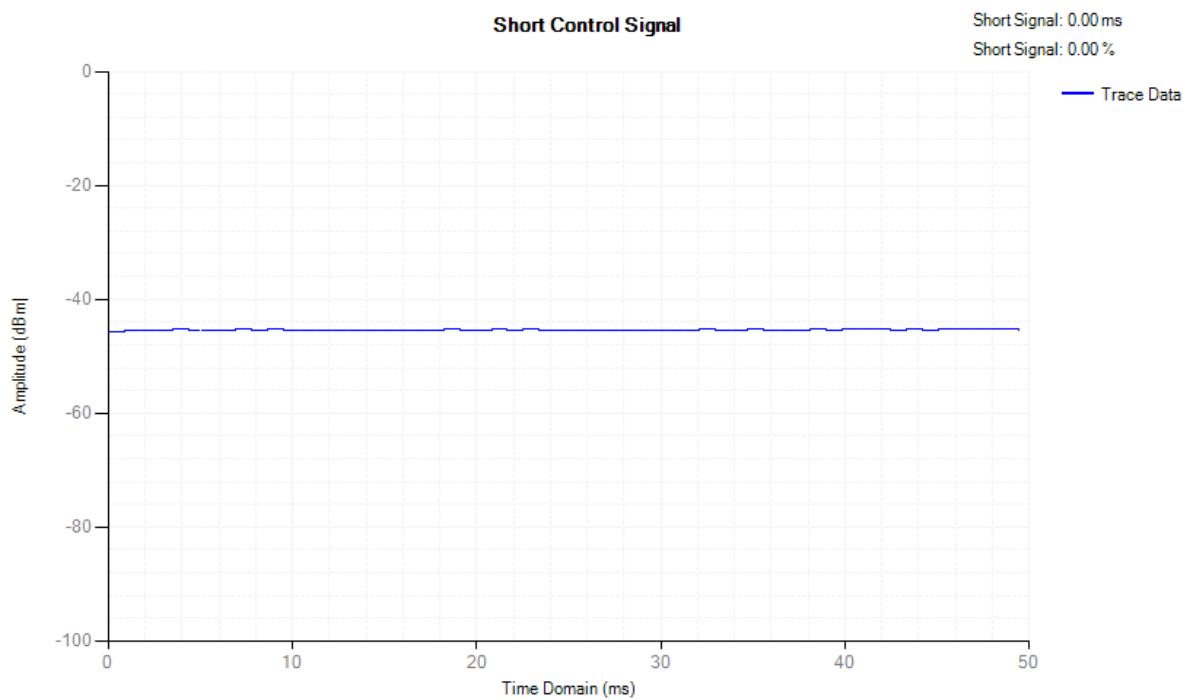


Adaptivity NVNT g 2412MHz

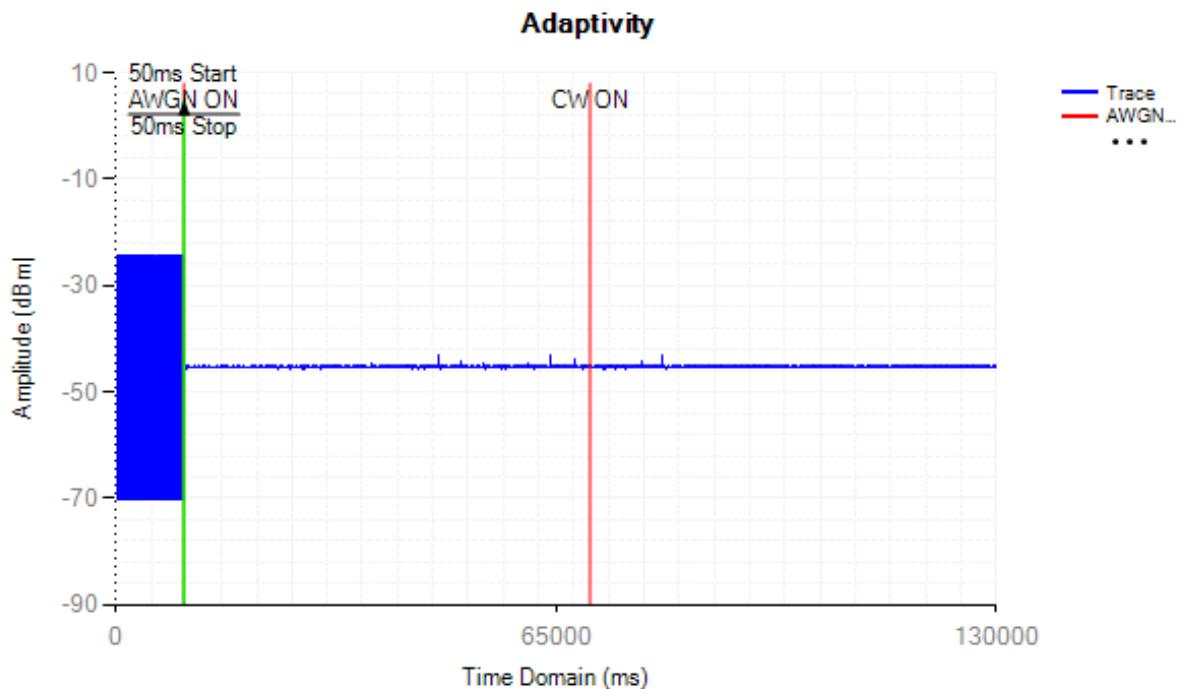


Control Signal NVNT g 2412MHz

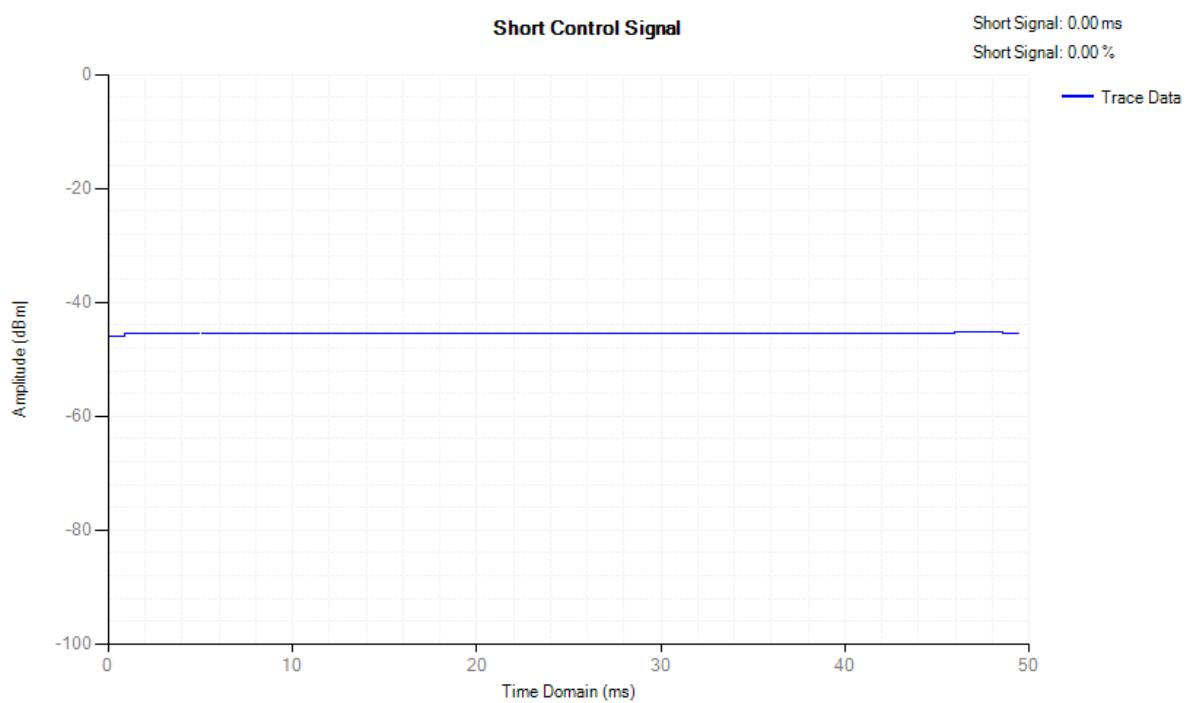


Adaptivity NVNT g 2472MHz

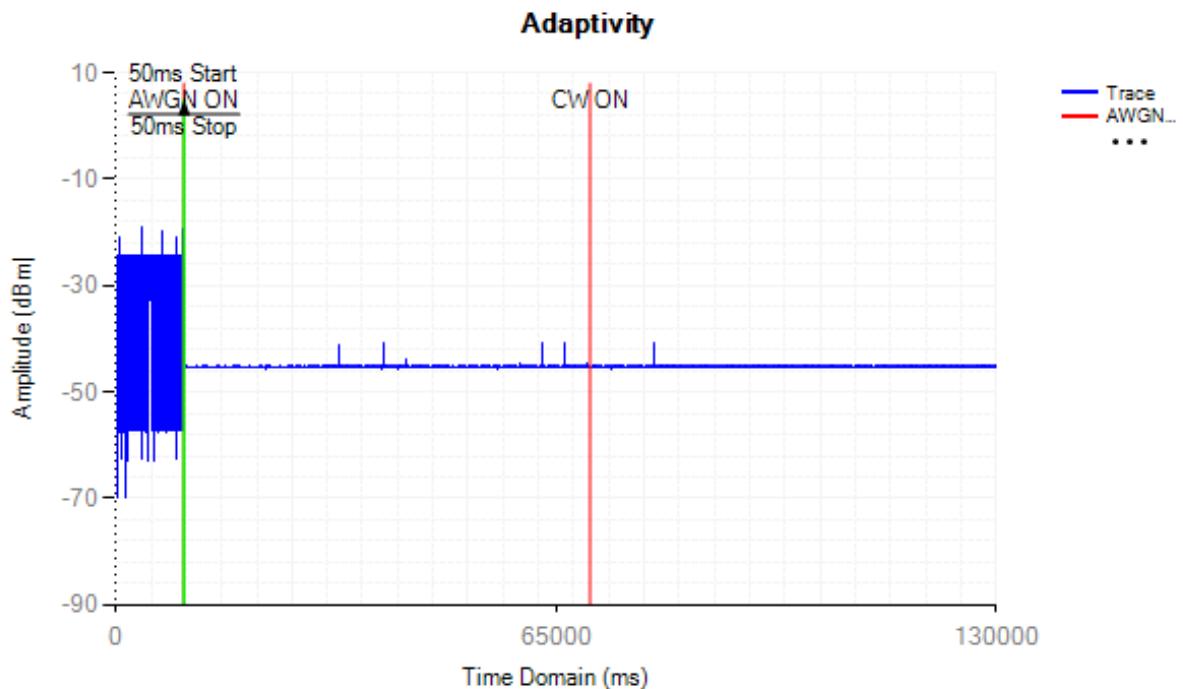


Control Signal NVNT g 2472MHz

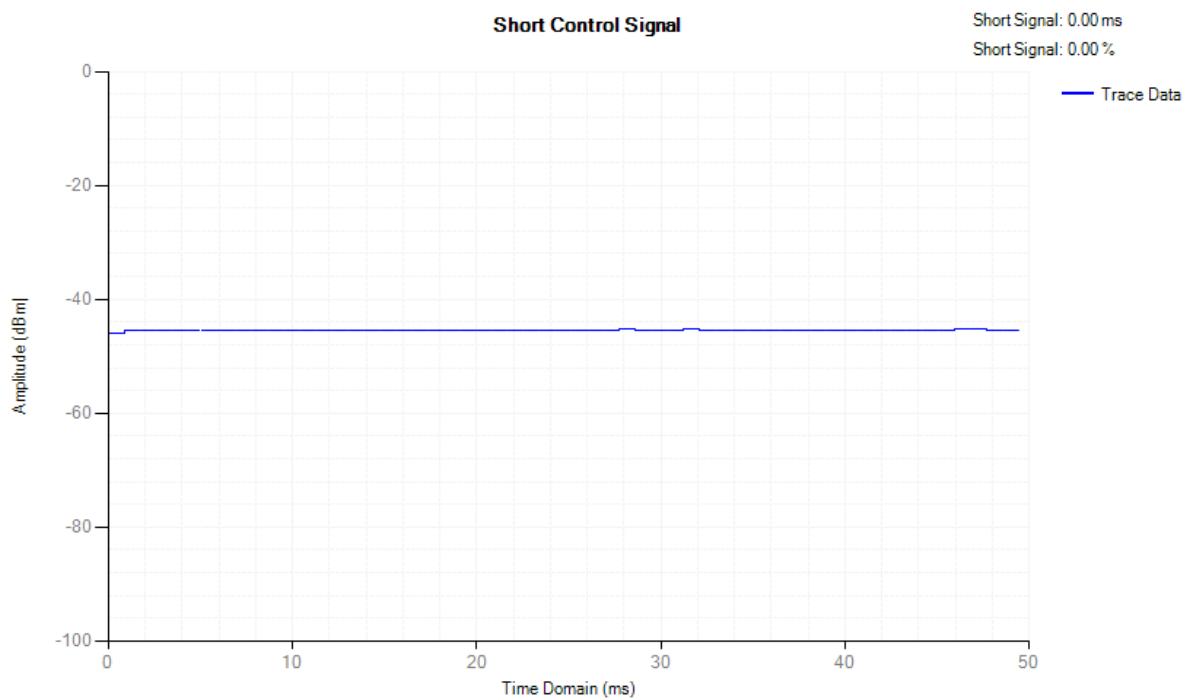


Adaptivity NVNT n20 2412MHz

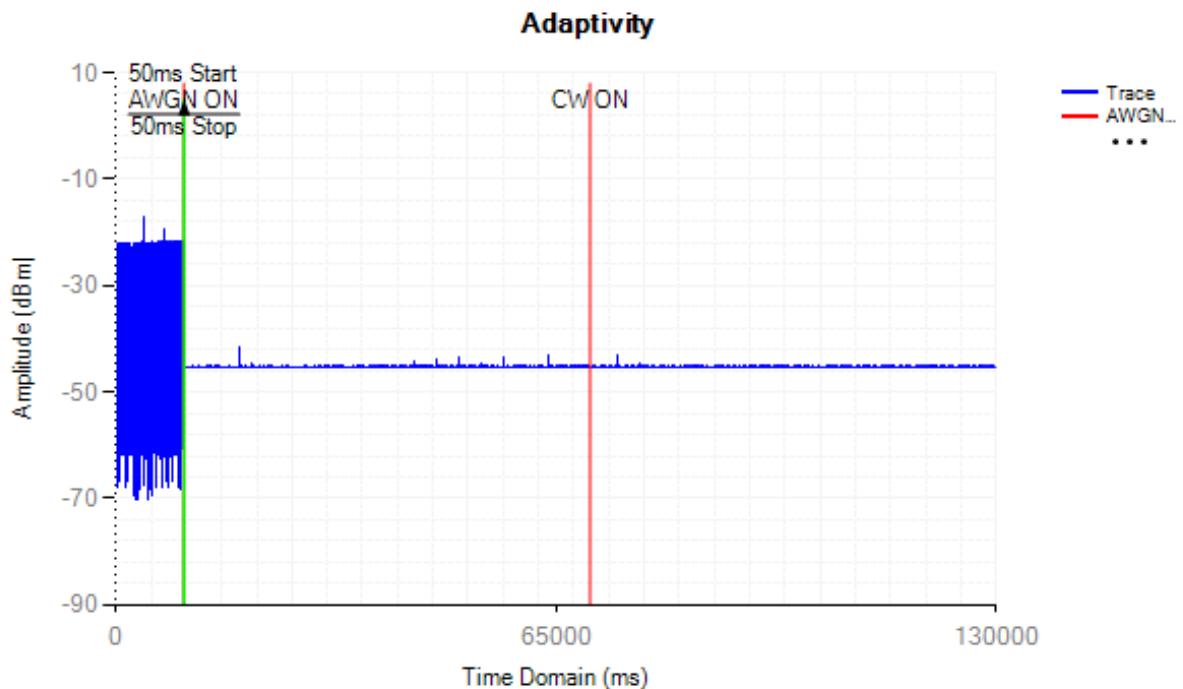


Control Signal NVNT n20 2412MHz

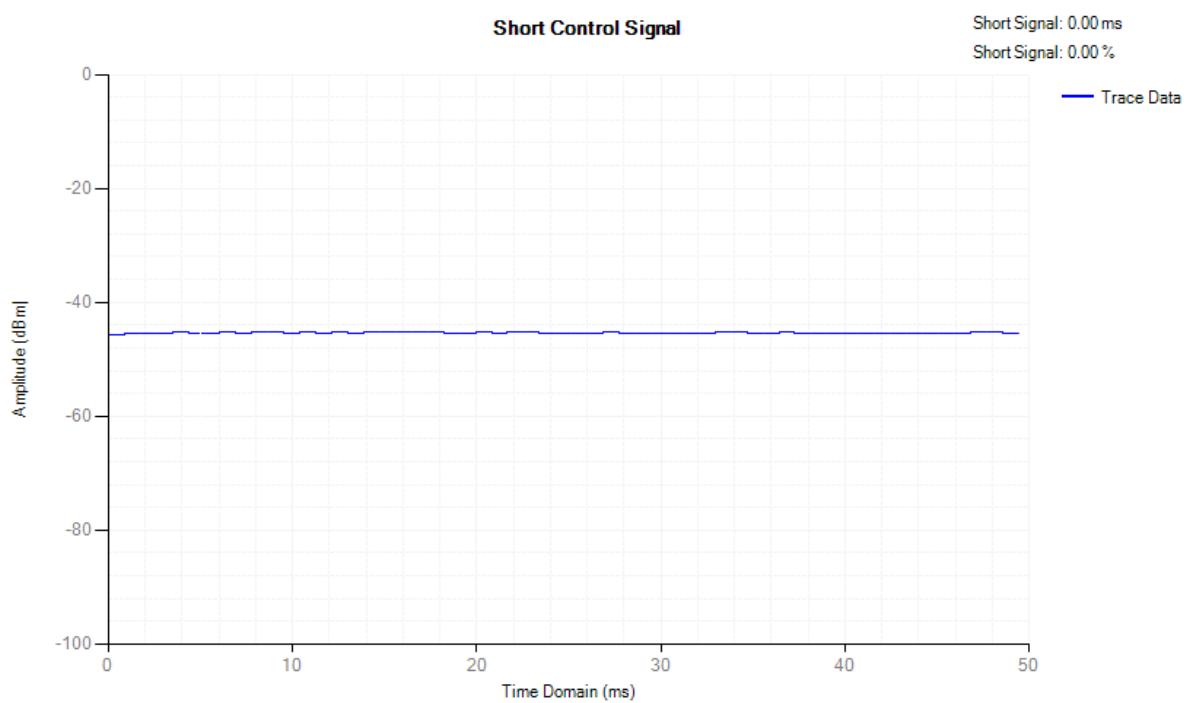

Adaptivity NVNT n20 2472MHz

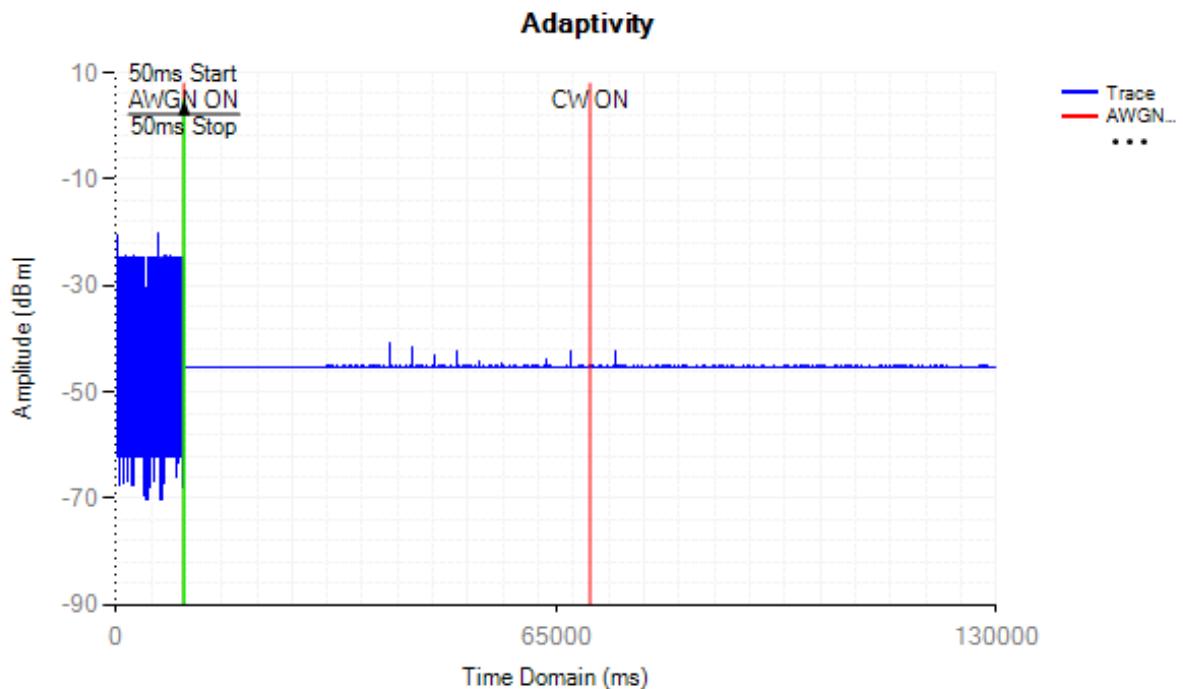

Control Signal NVNT n20 2472MHz

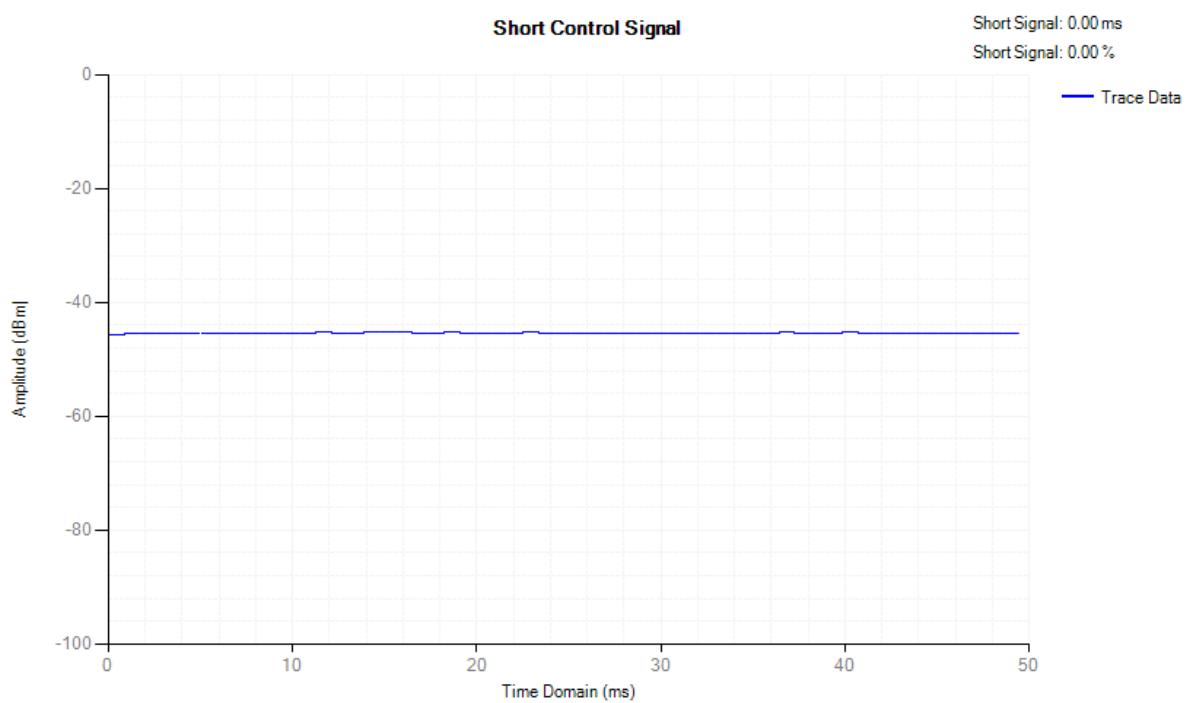


Adaptivity COT Channel Occupancy Time

Condition	Mode	Frequency (MHz)	Antenna	Max COT (ms)	Limit COT (ms)	Min Idle Time (ms)	Limit Idle Time (ms)	Verdict
NVNT	b	2412	Ant1	0.305	<=13	1.023	>0.018	Pass
NVNT	b	2472	Ant1	0.305	<=13	0.163	>0.018	Pass
NVNT	g	2412	Ant1	0.045	<=13	0.282	>0.018	Pass
NVNT	g	2472	Ant1	0.045	<=13	0.253	>0.018	Pass
NVNT	n20	2412	Ant1	0.045	<=13	0.112	>0.018	Pass
NVNT	n20	2472	Ant1	0.045	<=13	0.893	>0.018	Pass

COT NVNT b 2412MHz


Channel Occupation Time

Max COT: 0.31 ms

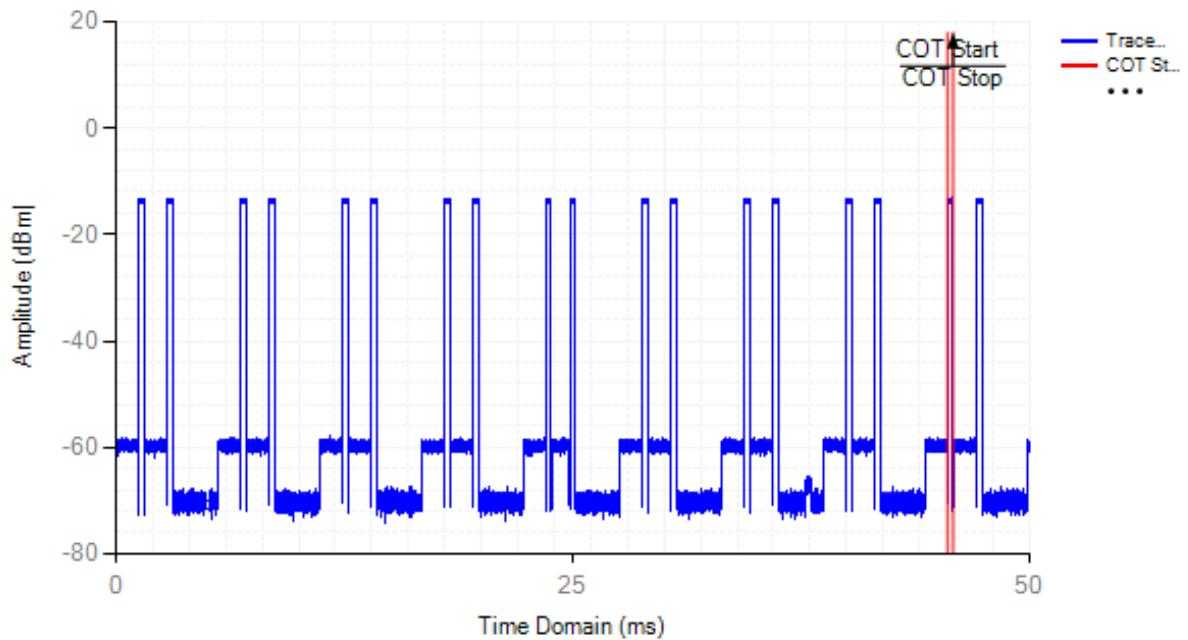


Idle NVNT b 2412MHz**Channel Occupation Time**

Min Idle Time: 1.02 ms

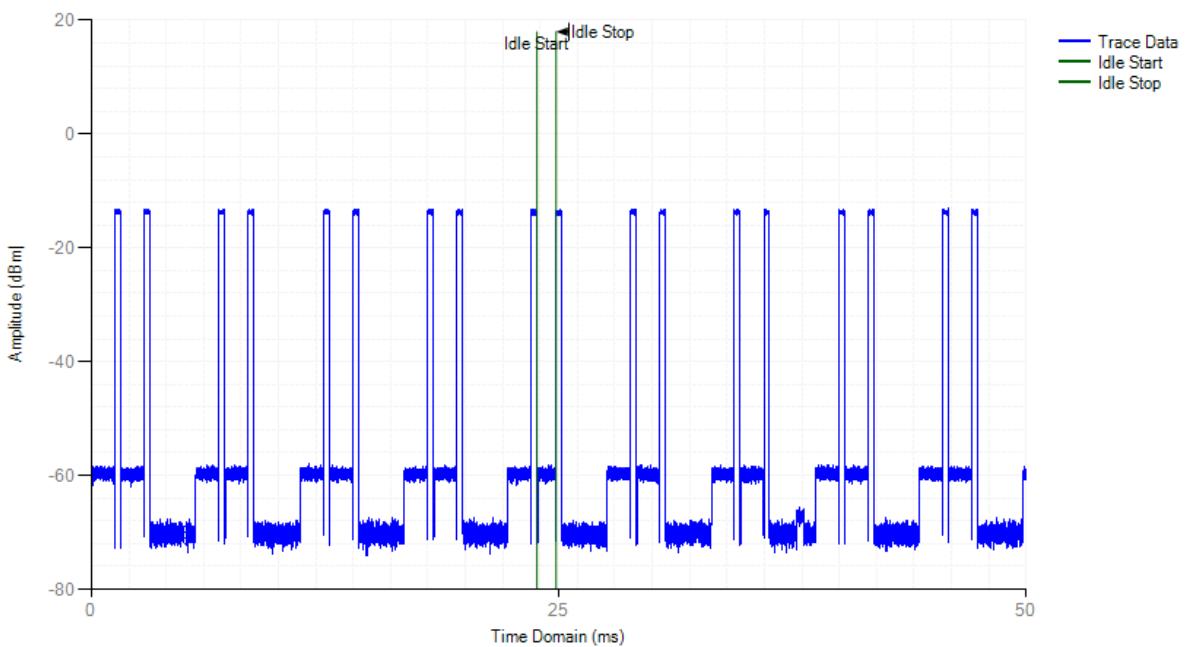
**COT NVNT b 2472MHz****Channel Occupation Time**

Max COT: 0.31 ms

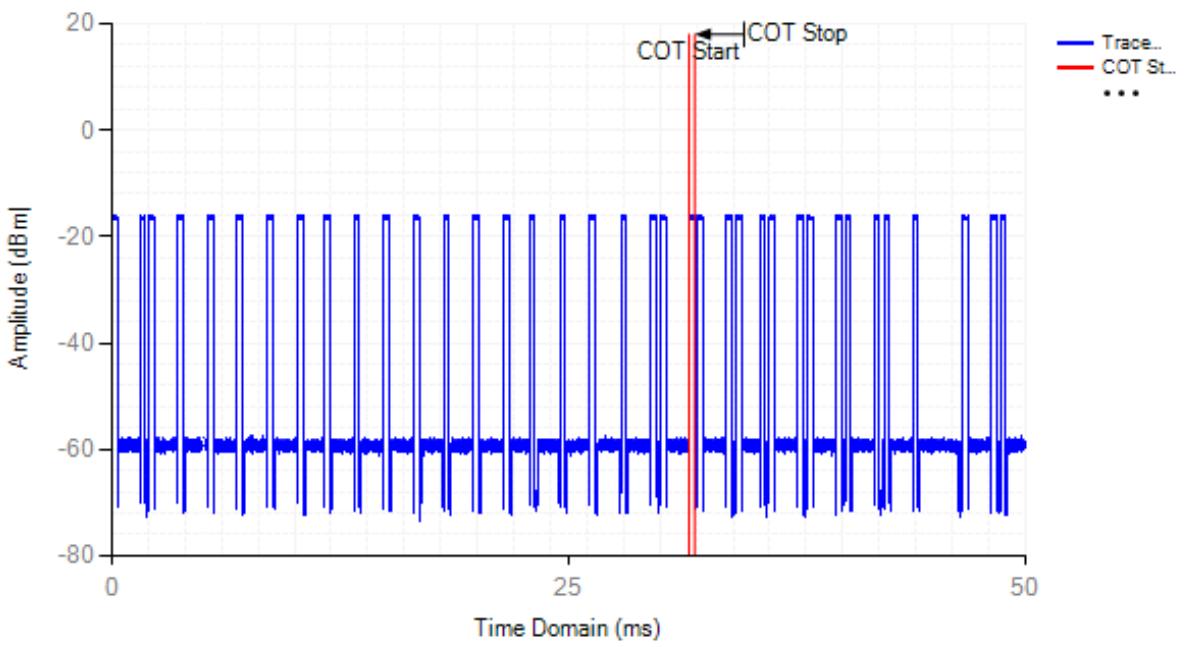



Idle NVNT b 2472MHz**Channel Occupation Time**


Min Idle Time: 0.16 ms

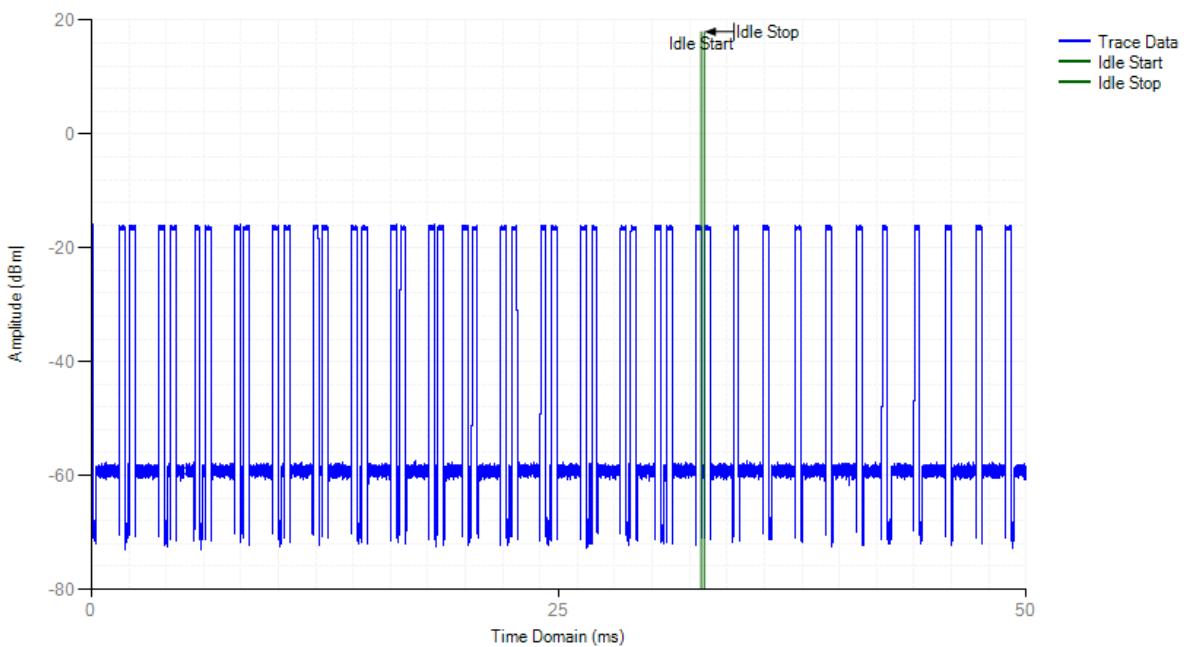**COT NVNT g 2412MHz****Channel Occupation Time**

Max COT: 0.05 ms

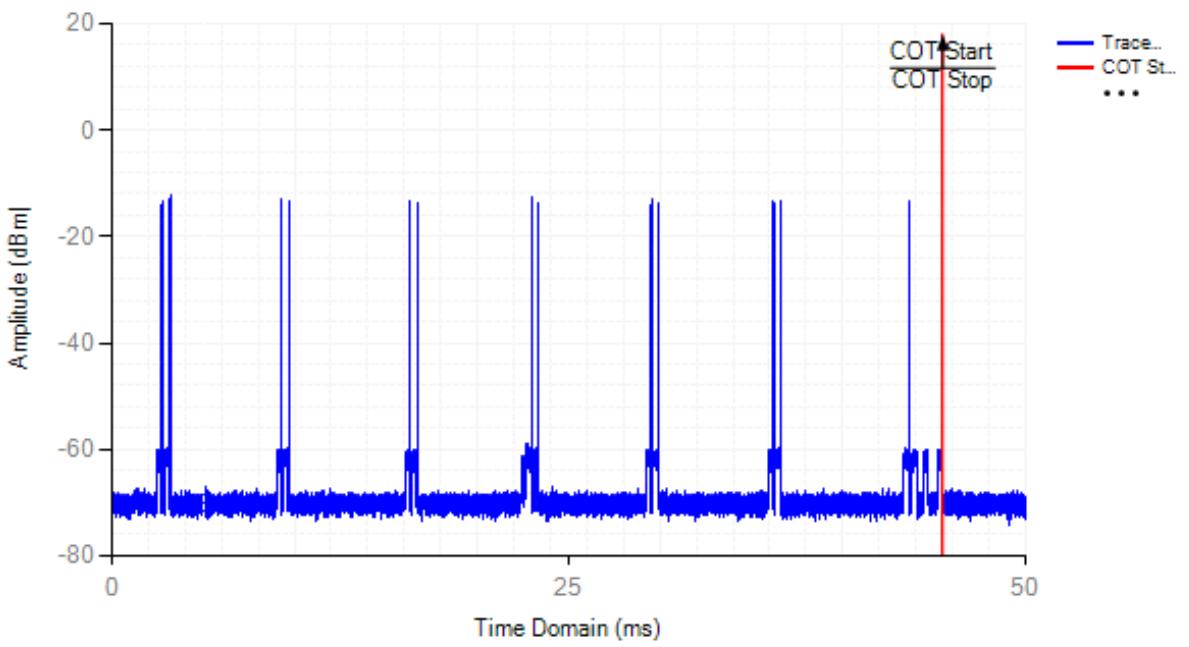


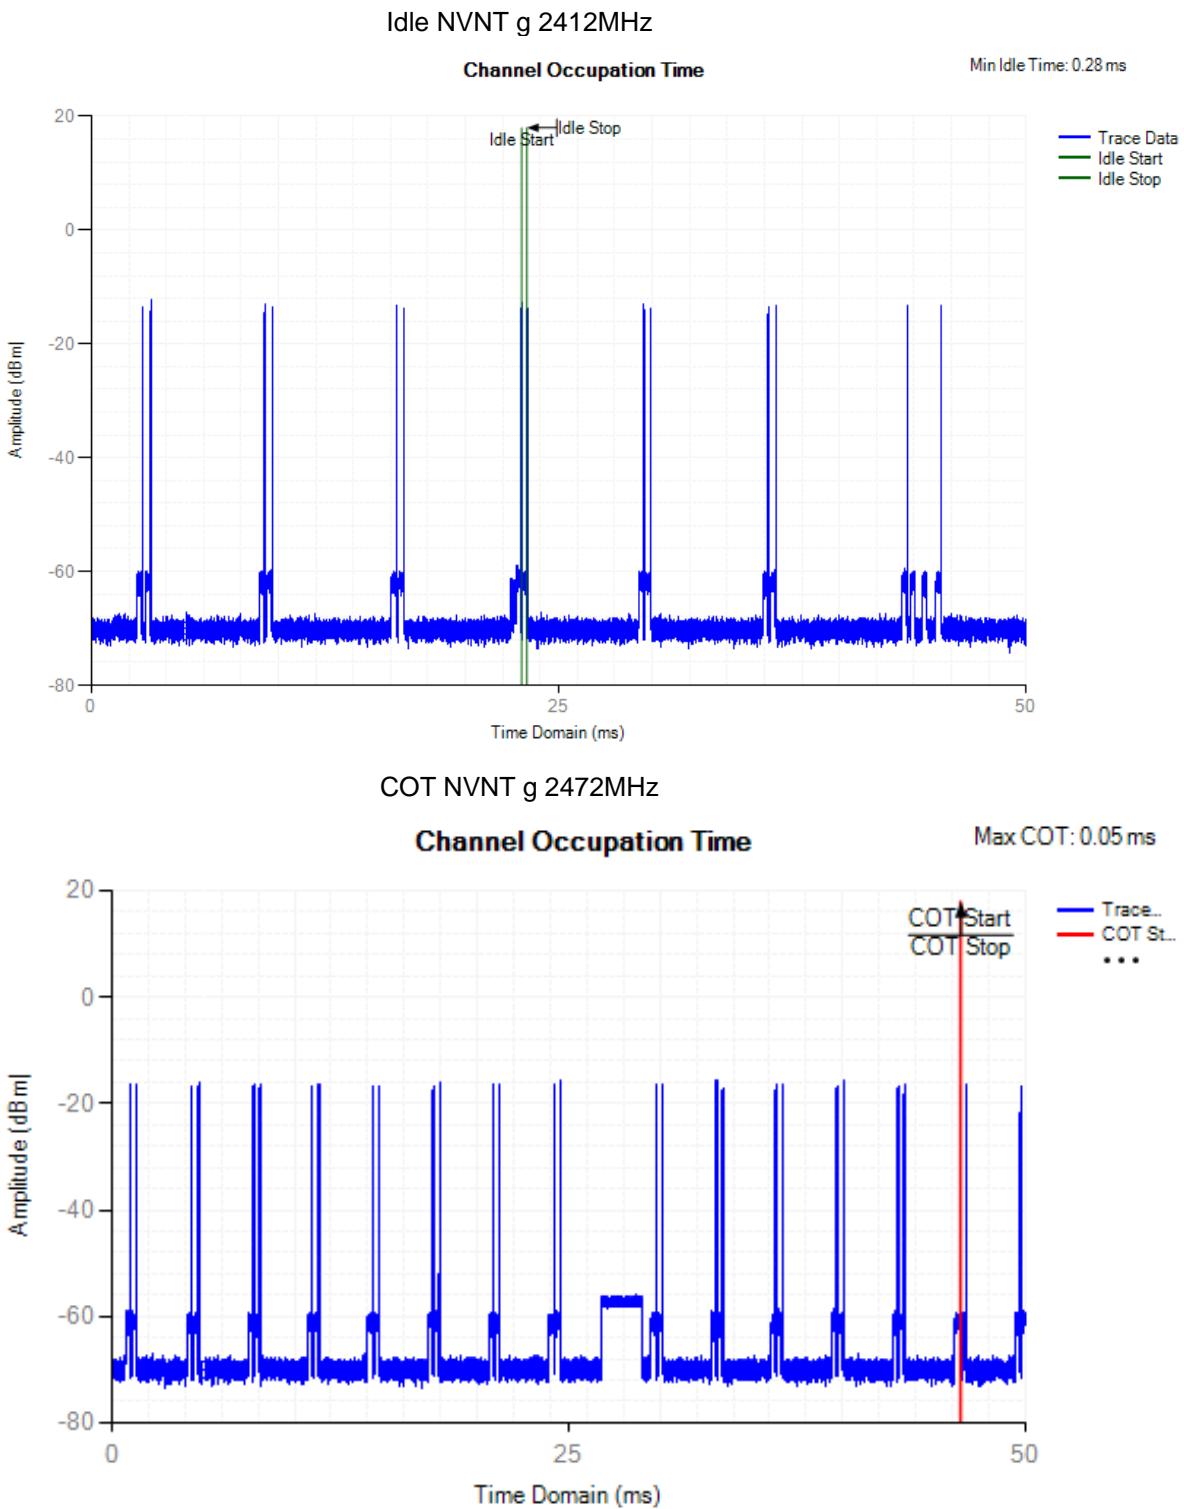

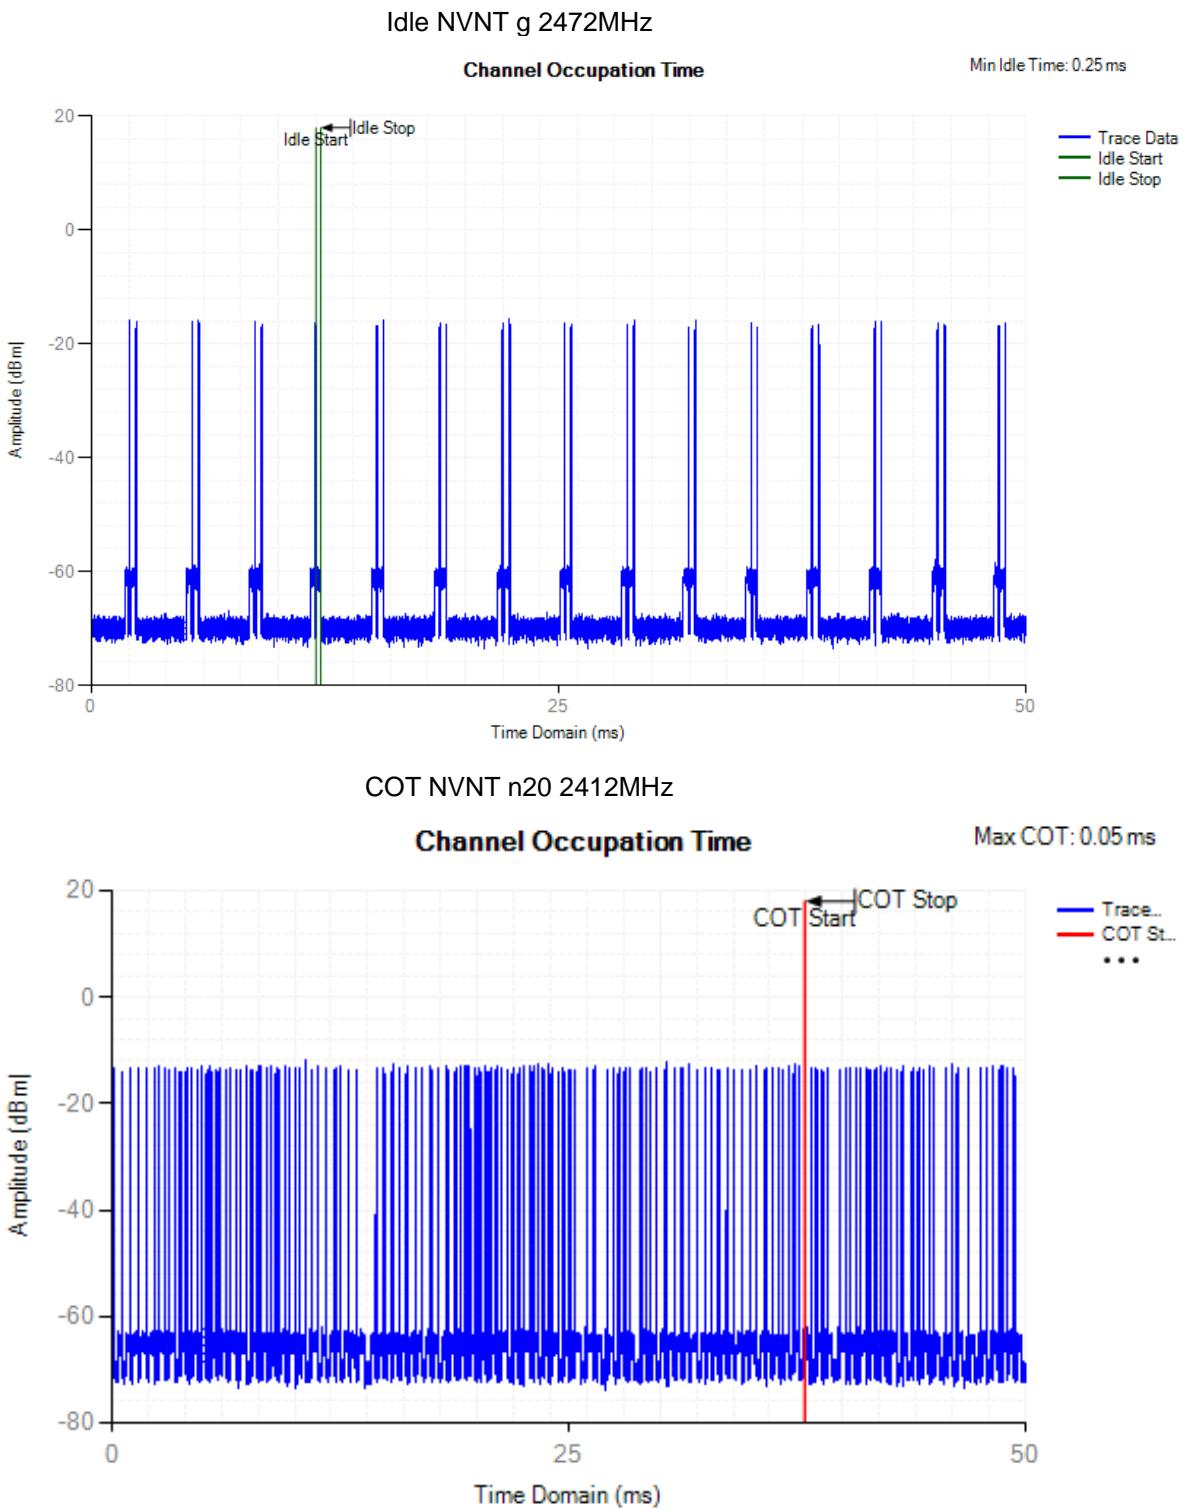



Idle NVNT n20 2412MHz**Channel Occupation Time**

Min Idle Time: 0.11 ms

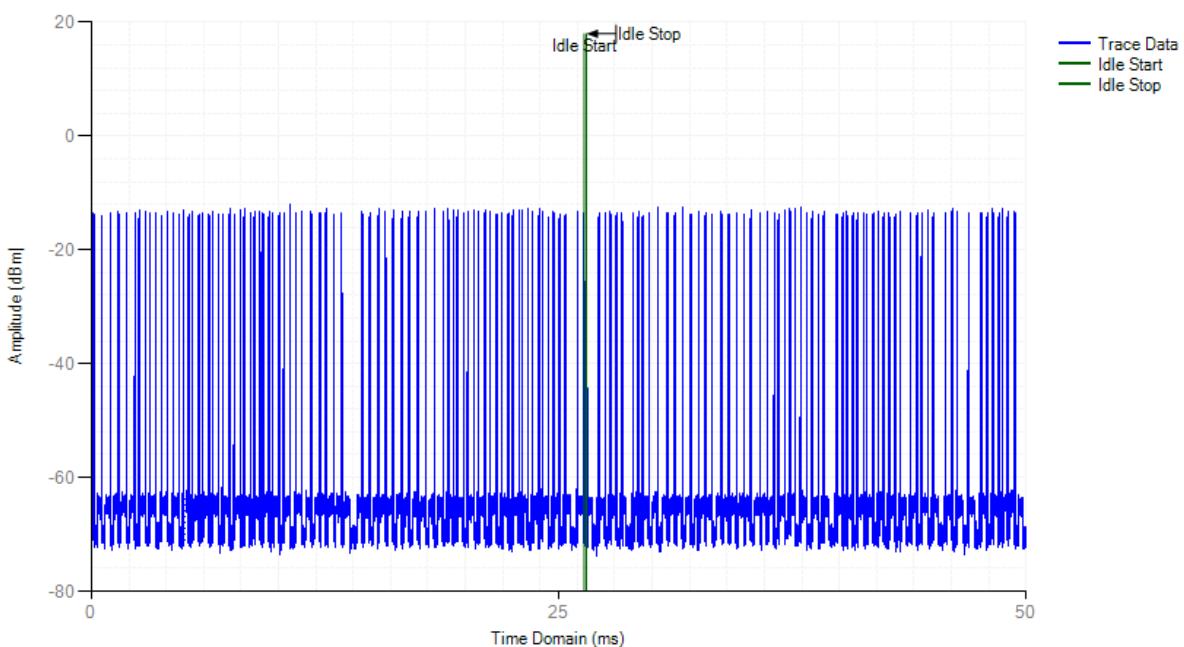**COT NVNT n20 2472MHz****Channel Occupation Time**

Max COT: 0.05 ms

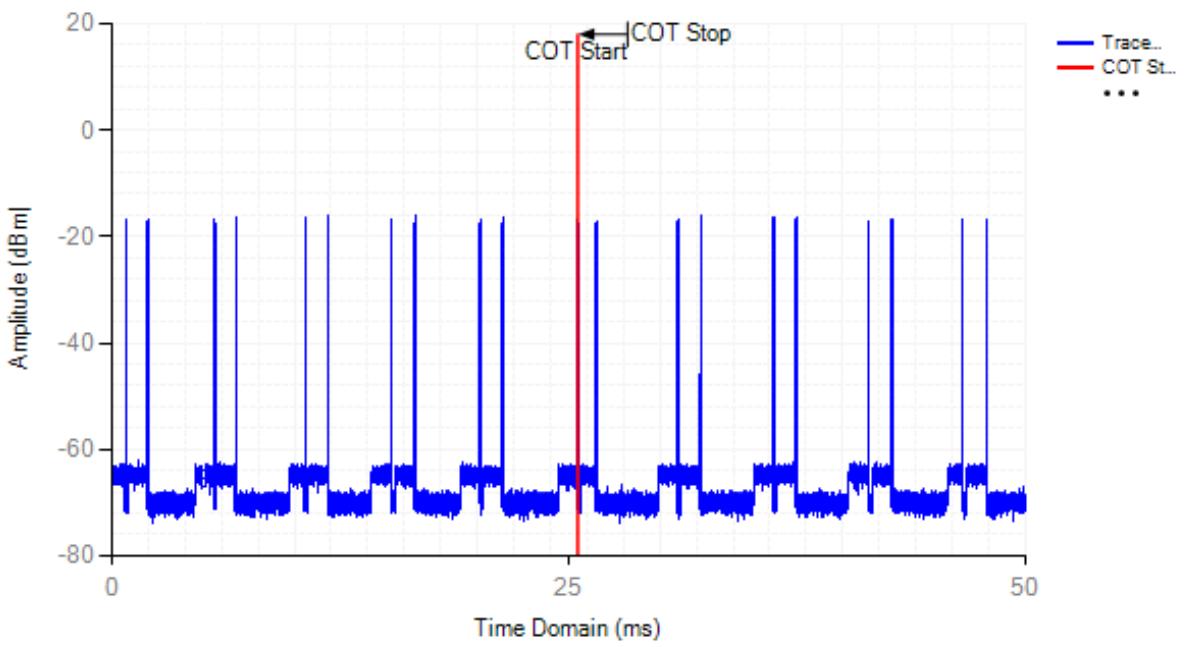

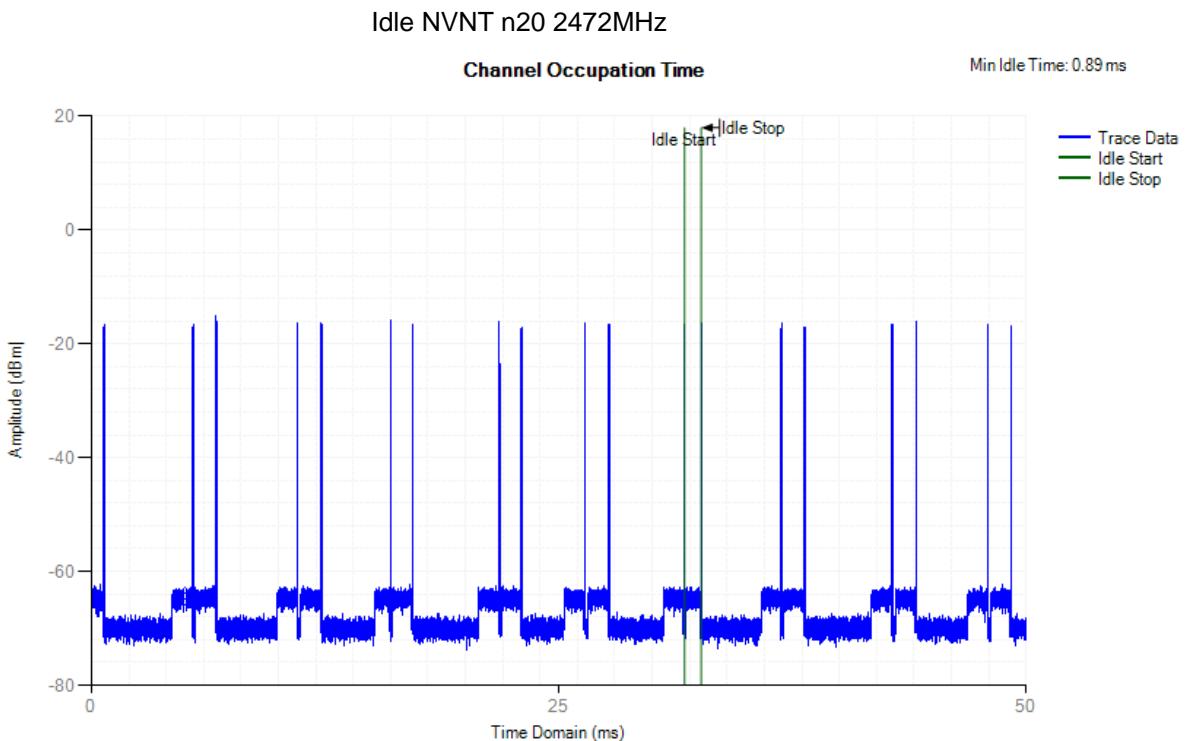


6. Occupied Channel Bandwidth

6.1. Limit

The Occupied Channel Bandwidth shall be within the band 2.4GHz to 2.4835GHz.

In addition, for non-adaptive non-FHSS equipment with e.i.r.p. greater than 10 dBm, the Occupied Channel Bandwidth shall be equal to or less than 20 MHz.

6.2. Test Setup



6.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.7.


Connect the UUT to the spectrum analyzer and use the following settings:

Centre Frequency	The centre frequency of the channel under test
Frequency Span	2 × Nominal Channel Bandwidth (e.g. 2 MHz for a 1 MHz channel)
RBW	~ 1 % of the span without going below 1 %
VBW	3 × RBW
Detector	RMS
Trace	Max hold
Sweep Time	1s


6.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	V
NVNT	b	2412	Ant1	2412	15.185	2404.408	2419.592	2400 - 2483.5M Hz	
NVNT	b	2442	Ant1	2442.02	15.225	2434.408	2449.632	2400 - 2483.5M Hz	
NVNT	b	2472	Ant1	2472.02	15.225	2464.408	2479.632	2400 - 2483.5M Hz	
NVNT	g	2412	Ant1	2412	16.464	2403.768	2420.232	2400 - 2483.5M Hz	
NVNT	g	2442	Ant1	2442.02	16.503	2433.768	2450.272	2400 - 2483.5M Hz	
NVNT	g	2472	Ant1	2472.02	16.503	2463.768	2480.272	2400 - 2483.5M Hz	
NVNT	n20	2412	Ant1	2412	17.263	2403.369	2420.631	2400 - 2483.5M Hz	
NVNT	n20	2442	Ant1	2442.02	17.303	2433.369	2450.671	2400 - 2483.5M Hz	
NVNT	n20	2472	Ant1	2472.02	17.303	2463.369	2480.671	2400 - 2483.5M Hz	


OBW NVNT b 2412MHz Ant1

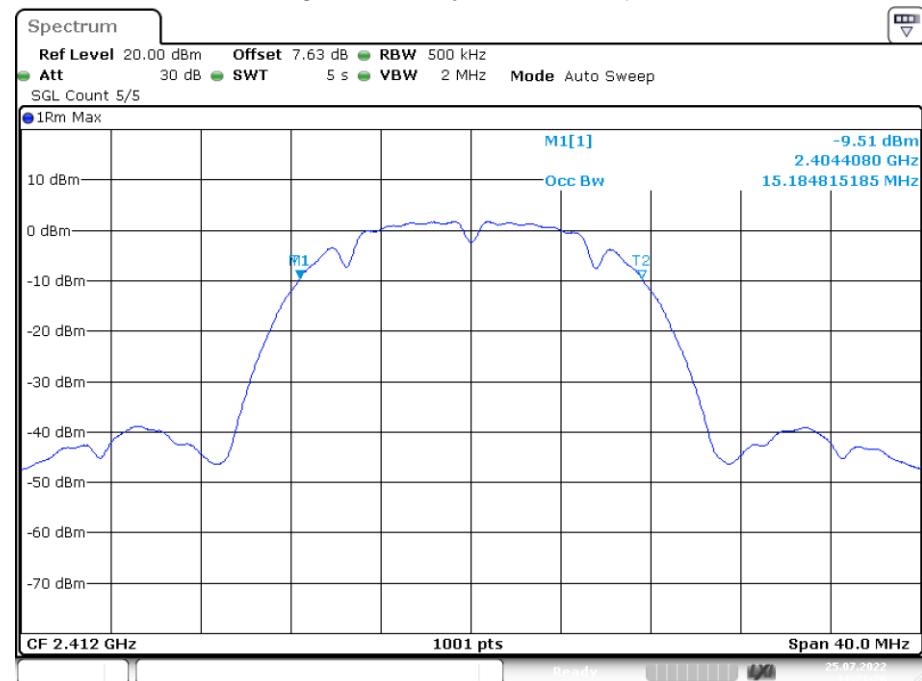


OBW NVNT b 2442MHz Ant1

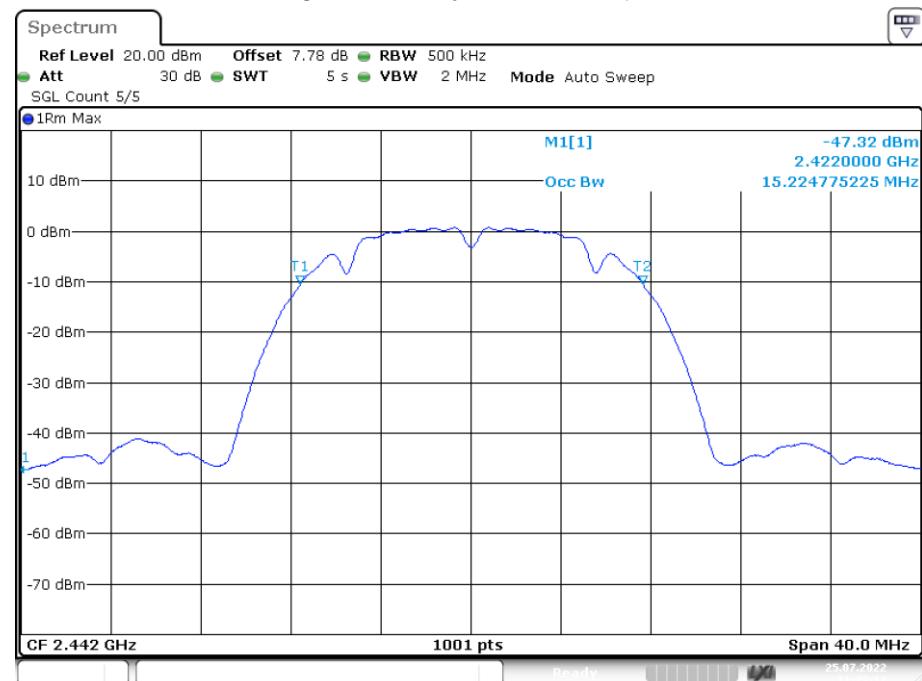


OBW NVNT b 2472MHz Ant1

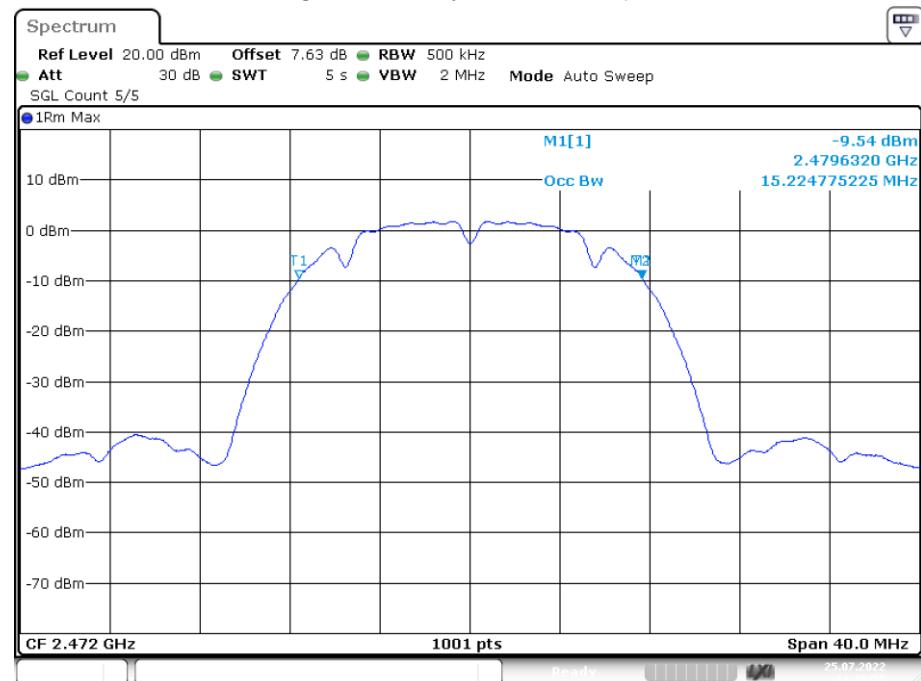


OBW NVNT g 2412MHz Ant1

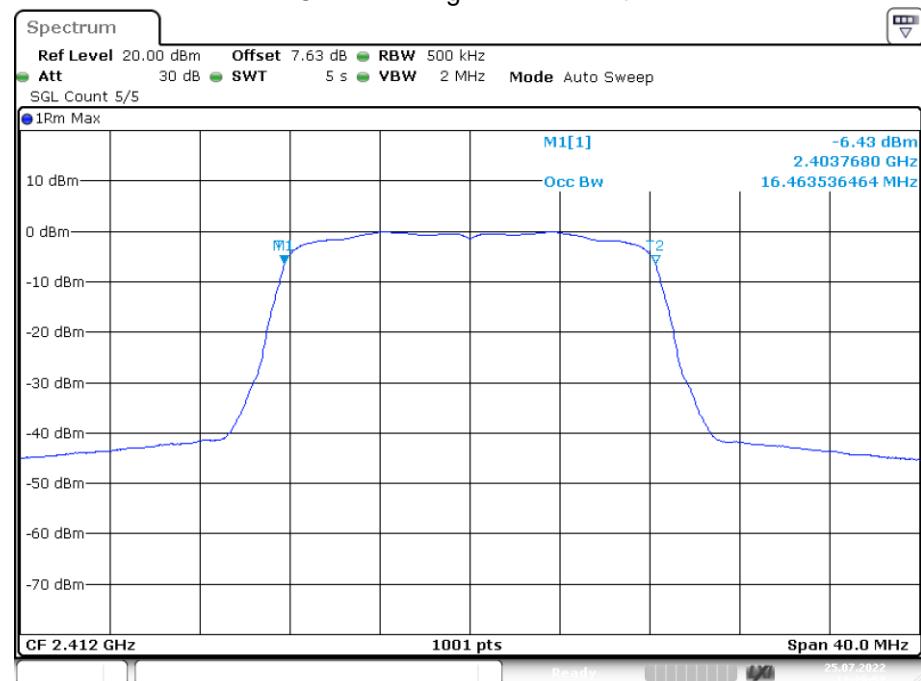


OBW NVNT g 2442MHz Ant1

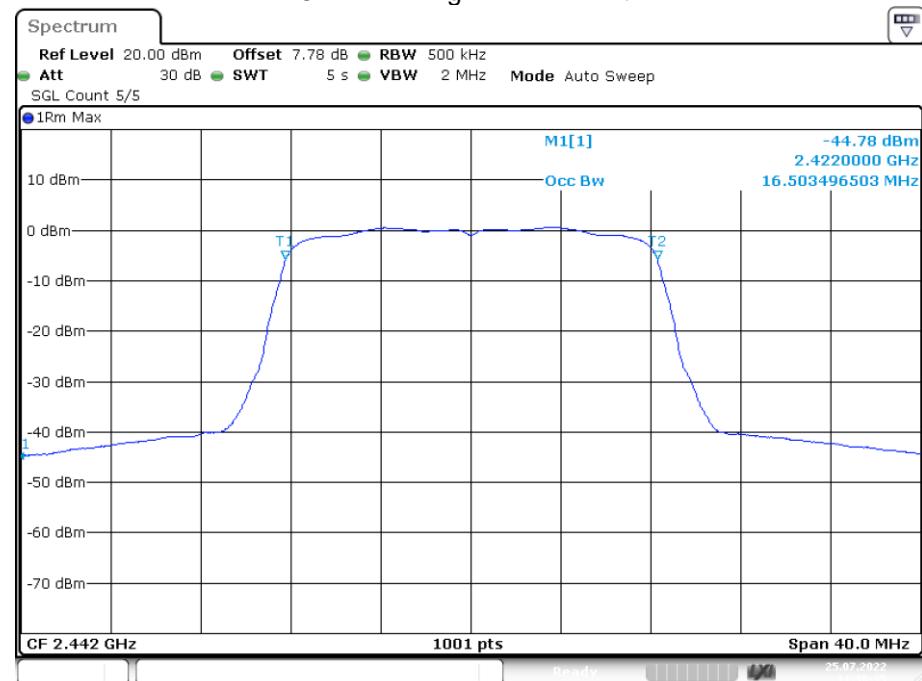


OBW NVNT g 2472MHz Ant1

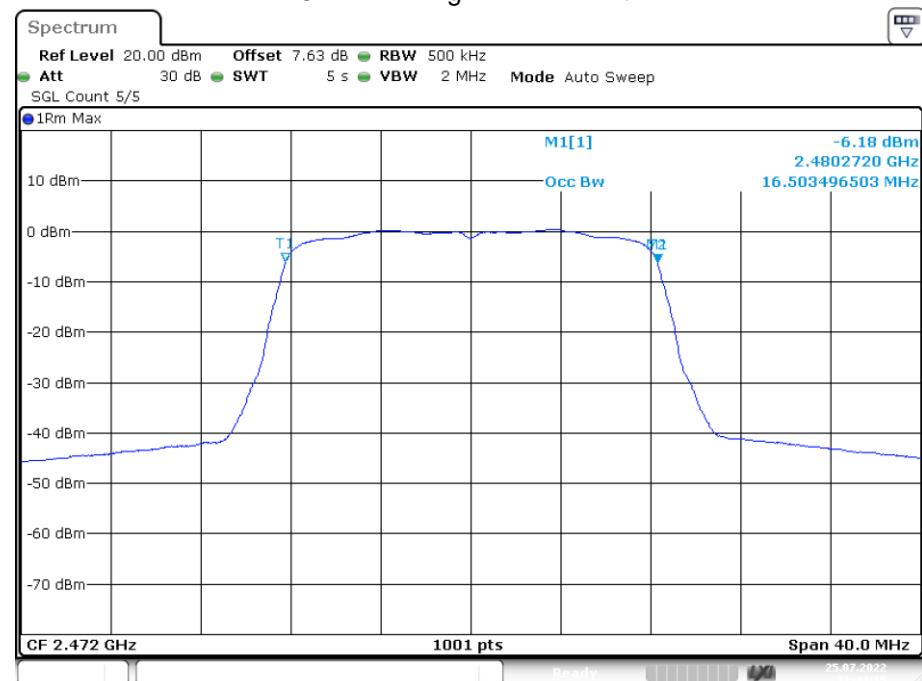


OBW NVNT n20 2412MHz Ant1

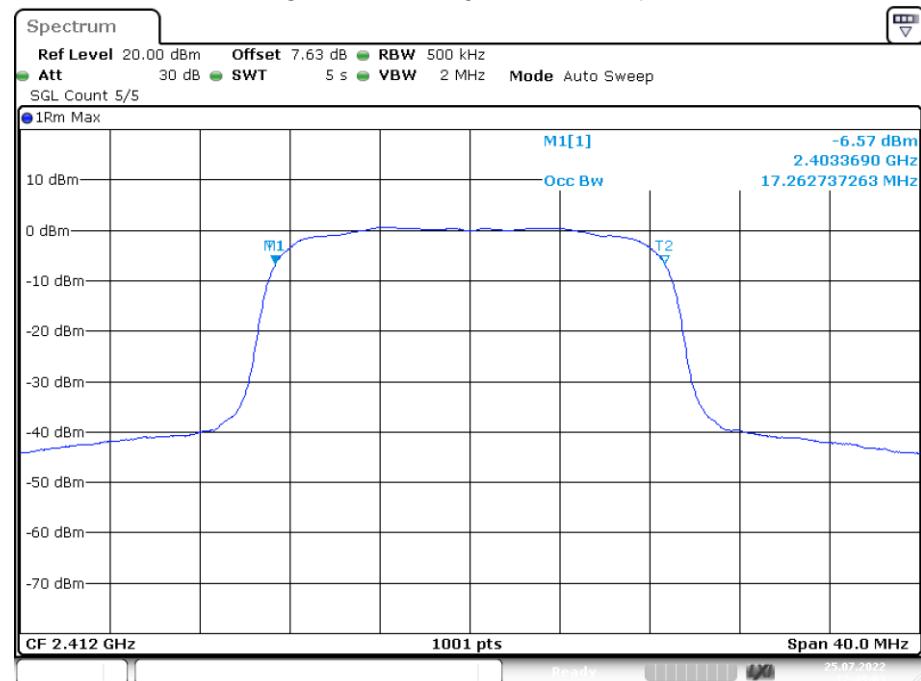

OBW NVNT n20 2442MHz Ant1

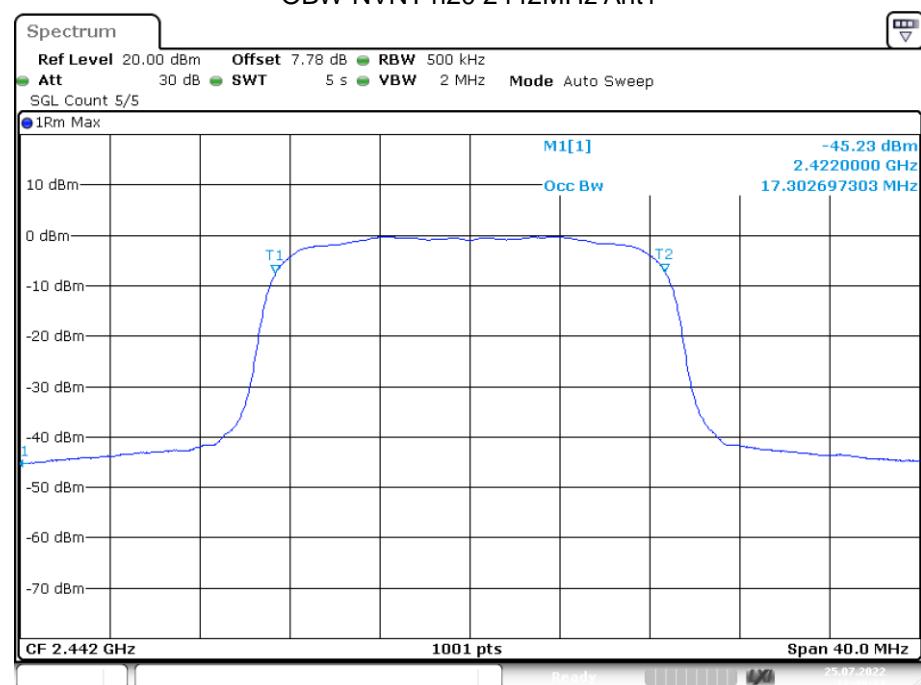

OBW NVNT n20 2472MHz Ant1

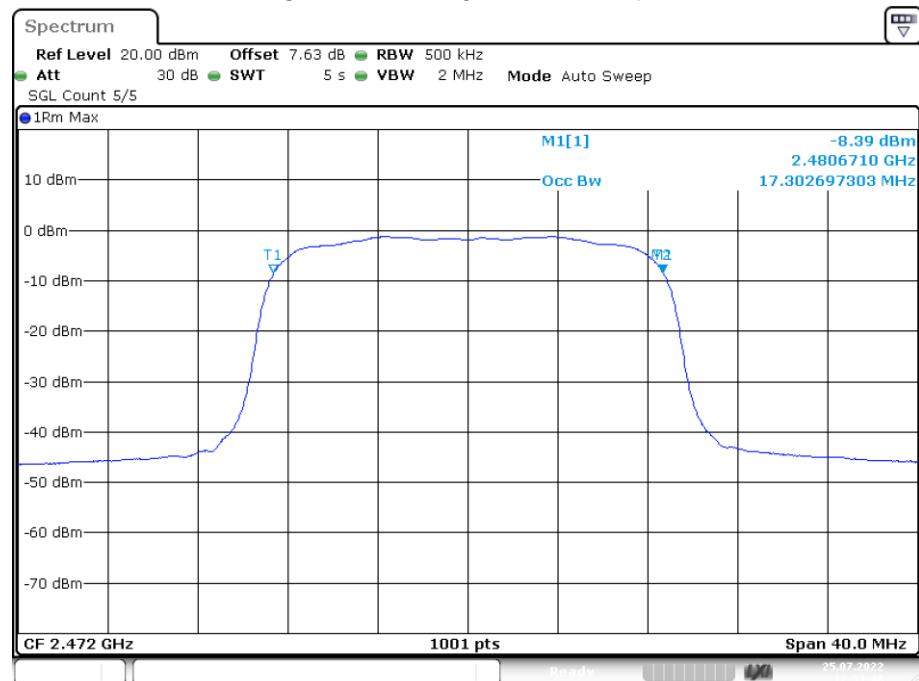

7. Transmitter unwanted emissions in the out-of-band domain

7.1. Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.


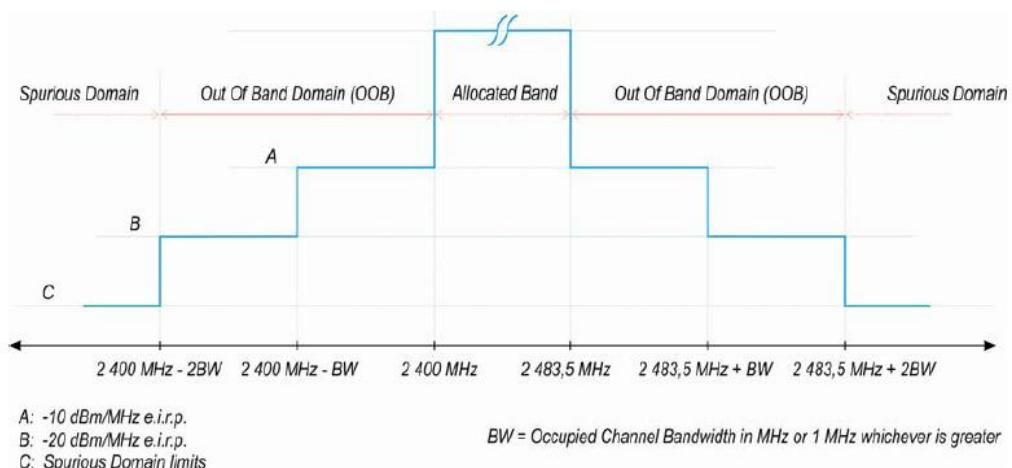


Figure 3: Transmit mask

7.2. Test Setup



7.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.8.

Connect the UUT to the spectrum analyzer and use the following settings:

RBW/ VBW	1MHz/3MHz
Span	0Hz
Filter mode	Channel filter
Sweep mode	Single Sweep
Sweep Points	Sweep time [μs] / (1 μs) with a maximum of 30 000
Sweep Time:	> 120 % of the duration of the longest burst detected during the measurement of the RF Output Power
Detector	RMS
Trace mode	Max Hold
Trigger Mode	Video trigger

7.4. Test Result


PASS.


Condition	Mode	Frequency (MHz)	Antenna	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	2399.5	-38.38	-10	Pass
NVNT	b	2412	Ant1	2398.5	-36.68	-10	Pass
NVNT	b	2412	Ant1	2397.5	-34.77	-10	Pass
NVNT	b	2412	Ant1	2396.5	-35.56	-10	Pass
NVNT	b	2412	Ant1	2395.5	-40.47	-10	Pass
NVNT	b	2412	Ant1	2394.5	-38.9	-10	Pass
NVNT	b	2412	Ant1	2393.5	-40.57	-10	Pass
NVNT	b	2412	Ant1	2392.5	-45.75	-10	Pass
NVNT	b	2412	Ant1	2391.5	-49.61	-10	Pass
NVNT	b	2412	Ant1	2390.5	-48.95	-10	Pass
NVNT	b	2412	Ant1	2389.5	-50.13	-10	Pass
NVNT	b	2412	Ant1	2388.5	-50.83	-10	Pass
NVNT	b	2412	Ant1	2387.5	-49.26	-10	Pass
NVNT	b	2412	Ant1	2386.5	-48.54	-10	Pass
NVNT	b	2412	Ant1	2385.5	-48.89	-10	Pass
NVNT	b	2412	Ant1	2385.275	-49.38	-10	Pass
NVNT	b	2412	Ant1	2384.275	-50.33	-20	Pass
NVNT	b	2412	Ant1	2383.275	-49.88	-20	Pass
NVNT	b	2412	Ant1	2382.275	-50.83	-20	Pass
NVNT	b	2412	Ant1	2381.275	-52.23	-20	Pass
NVNT	b	2412	Ant1	2380.275	-53.16	-20	Pass
NVNT	b	2412	Ant1	2379.275	-53.32	-20	Pass
NVNT	b	2412	Ant1	2378.275	-53.56	-20	Pass
NVNT	b	2412	Ant1	2377.275	-53.68	-20	Pass
NVNT	b	2412	Ant1	2376.275	-53.44	-20	Pass
NVNT	b	2412	Ant1	2375.275	-53.42	-20	Pass
NVNT	b	2412	Ant1	2374.275	-53.82	-20	Pass
NVNT	b	2412	Ant1	2373.275	-54.12	-20	Pass
NVNT	b	2412	Ant1	2372.275	-54.1	-20	Pass
NVNT	b	2412	Ant1	2371.275	-54.41	-20	Pass
NVNT	b	2412	Ant1	2370.275	-54.64	-20	Pass
NVNT	b	2412	Ant1	2370.05	-54.62	-20	Pass
NVNT	b	2472	Ant1	2484	-45.25	-10	Pass
NVNT	b	2472	Ant1	2485	-45.89	-10	Pass
NVNT	b	2472	Ant1	2486	-43.41	-10	Pass
NVNT	b	2472	Ant1	2487	-42.93	-10	Pass
NVNT	b	2472	Ant1	2488	-46.41	-10	Pass
NVNT	b	2472	Ant1	2489	-46.41	-10	Pass
NVNT	b	2472	Ant1	2490	-47.22	-10	Pass
NVNT	b	2472	Ant1	2491	-48.98	-10	Pass
NVNT	b	2472	Ant1	2492	-51.55	-10	Pass
NVNT	b	2472	Ant1	2493	-51.61	-10	Pass
NVNT	b	2472	Ant1	2494	-51.85	-10	Pass
NVNT	b	2472	Ant1	2495	-52.33	-10	Pass
NVNT	b	2472	Ant1	2496	-52.28	-10	Pass
NVNT	b	2472	Ant1	2497	-52.42	-10	Pass
NVNT	b	2472	Ant1	2498	-52.63	-10	Pass
NVNT	b	2472	Ant1	2498.225	-52.69	-10	Pass
NVNT	b	2472	Ant1	2499.225	-52.94	-20	Pass
NVNT	b	2472	Ant1	2500.225	-53.2	-20	Pass
NVNT	b	2472	Ant1	2501.225	-53.23	-20	Pass
NVNT	b	2472	Ant1	2502.225	-53.37	-20	Pass


NVNT	b	2472	Ant1	2503.225	-53.55	-20	Pass
NVNT	b	2472	Ant1	2504.225	-53.59	-20	Pass
NVNT	b	2472	Ant1	2505.225	-53.66	-20	Pass
NVNT	b	2472	Ant1	2506.225	-53.79	-20	Pass
NVNT	b	2472	Ant1	2507.225	-53.82	-20	Pass
NVNT	b	2472	Ant1	2508.225	-53.87	-20	Pass
NVNT	b	2472	Ant1	2509.225	-53.89	-20	Pass
NVNT	b	2472	Ant1	2510.225	-54.01	-20	Pass
NVNT	b	2472	Ant1	2511.225	-54.07	-20	Pass
NVNT	b	2472	Ant1	2512.225	-54.12	-20	Pass
NVNT	b	2472	Ant1	2513.225	-54.24	-20	Pass
NVNT	b	2472	Ant1	2513.45	-54.23	-20	Pass
NVNT	g	2412	Ant1	2399.5	-29.6	-10	Pass
NVNT	g	2412	Ant1	2398.5	-30.82	-10	Pass
NVNT	g	2412	Ant1	2397.5	-31.47	-10	Pass
NVNT	g	2412	Ant1	2396.5	-32.77	-10	Pass
NVNT	g	2412	Ant1	2395.5	-33.66	-10	Pass
NVNT	g	2412	Ant1	2394.5	-35.13	-10	Pass
NVNT	g	2412	Ant1	2393.5	-36.09	-10	Pass
NVNT	g	2412	Ant1	2392.5	-36.15	-10	Pass
NVNT	g	2412	Ant1	2391.5	-37.24	-10	Pass
NVNT	g	2412	Ant1	2390.5	-39.31	-10	Pass
NVNT	g	2412	Ant1	2389.5	-38.67	-10	Pass
NVNT	g	2412	Ant1	2388.5	-40.75	-10	Pass
NVNT	g	2412	Ant1	2387.5	-40.51	-10	Pass
NVNT	g	2412	Ant1	2386.5	-41.04	-10	Pass
NVNT	g	2412	Ant1	2385.5	-41.69	-10	Pass
NVNT	g	2412	Ant1	2384.5	-42.31	-10	Pass
NVNT	g	2412	Ant1	2384.036	-42.86	-10	Pass
NVNT	g	2412	Ant1	2383.036	-42.73	-20	Pass
NVNT	g	2412	Ant1	2382.036	-44.25	-20	Pass
NVNT	g	2412	Ant1	2381.036	-44.33	-20	Pass
NVNT	g	2412	Ant1	2380.036	-44.97	-20	Pass
NVNT	g	2412	Ant1	2379.036	-44.4	-20	Pass
NVNT	g	2412	Ant1	2378.036	-46.18	-20	Pass
NVNT	g	2412	Ant1	2377.036	-46.51	-20	Pass
NVNT	g	2412	Ant1	2376.036	-47.54	-20	Pass
NVNT	g	2412	Ant1	2375.036	-47.8	-20	Pass
NVNT	g	2412	Ant1	2374.036	-48.51	-20	Pass
NVNT	g	2412	Ant1	2373.036	-48.59	-20	Pass
NVNT	g	2412	Ant1	2372.036	-49.46	-20	Pass
NVNT	g	2412	Ant1	2371.036	-49.56	-20	Pass
NVNT	g	2412	Ant1	2370.036	-50.13	-20	Pass
NVNT	g	2412	Ant1	2369.036	-50.6	-20	Pass
NVNT	g	2412	Ant1	2368.036	-50.85	-20	Pass
NVNT	g	2412	Ant1	2367.572	-51.07	-20	Pass
NVNT	g	2472	Ant1	2484	-28.57	-10	Pass
NVNT	g	2472	Ant1	2485	-27.36	-10	Pass
NVNT	g	2472	Ant1	2486	-27.84	-10	Pass
NVNT	g	2472	Ant1	2487	-29.4	-10	Pass
NVNT	g	2472	Ant1	2488	-31.41	-10	Pass
NVNT	g	2472	Ant1	2489	-33.92	-10	Pass
NVNT	g	2472	Ant1	2490	-33.12	-10	Pass
NVNT	g	2472	Ant1	2491	-35.13	-10	Pass
NVNT	g	2472	Ant1	2492	-36.97	-10	Pass
NVNT	g	2472	Ant1	2493	-38.32	-10	Pass
NVNT	g	2472	Ant1	2494	-38.63	-10	Pass
NVNT	g	2472	Ant1	2495	-39.6	-10	Pass
NVNT	g	2472	Ant1	2496	-41.17	-10	Pass

NVNT	g	2472	Ant1	2497	-41.52	-10	Pass
NVNT	g	2472	Ant1	2498	-43.02	-10	Pass
NVNT	g	2472	Ant1	2499	-43.71	-10	Pass
NVNT	g	2472	Ant1	2499.503	-44.32	-10	Pass
NVNT	g	2472	Ant1	2500.503	-44.71	-20	Pass
NVNT	g	2472	Ant1	2501.503	-45.41	-20	Pass
NVNT	g	2472	Ant1	2502.503	-45.87	-20	Pass
NVNT	g	2472	Ant1	2503.503	-46.59	-20	Pass
NVNT	g	2472	Ant1	2504.503	-47.02	-20	Pass
NVNT	g	2472	Ant1	2505.503	-48.39	-20	Pass
NVNT	g	2472	Ant1	2506.503	-48.66	-20	Pass
NVNT	g	2472	Ant1	2507.503	-49.08	-20	Pass
NVNT	g	2472	Ant1	2508.503	-49.63	-20	Pass
NVNT	g	2472	Ant1	2509.503	-49.94	-20	Pass
NVNT	g	2472	Ant1	2510.503	-49.76	-20	Pass
NVNT	g	2472	Ant1	2511.503	-50.4	-20	Pass
NVNT	g	2472	Ant1	2512.503	-50.51	-20	Pass
NVNT	g	2472	Ant1	2513.503	-50.8	-20	Pass
NVNT	g	2472	Ant1	2514.503	-50.96	-20	Pass
NVNT	g	2472	Ant1	2515.503	-51.08	-20	Pass
NVNT	g	2472	Ant1	2516.006	-51.15	-20	Pass
NVNT	n20	2412	Ant1	2399.5	-29.78	-10	Pass
NVNT	n20	2412	Ant1	2398.5	-27.22	-10	Pass
NVNT	n20	2412	Ant1	2397.5	-26.96	-10	Pass
NVNT	n20	2412	Ant1	2396.5	-29.33	-10	Pass
NVNT	n20	2412	Ant1	2395.5	-28.28	-10	Pass
NVNT	n20	2412	Ant1	2394.5	-29.28	-10	Pass
NVNT	n20	2412	Ant1	2393.5	-32.69	-10	Pass
NVNT	n20	2412	Ant1	2392.5	-34.74	-10	Pass
NVNT	n20	2412	Ant1	2391.5	-35.42	-10	Pass
NVNT	n20	2412	Ant1	2390.5	-35.13	-10	Pass
NVNT	n20	2412	Ant1	2389.5	-38.15	-10	Pass
NVNT	n20	2412	Ant1	2388.5	-38.63	-10	Pass
NVNT	n20	2412	Ant1	2387.5	-39.57	-10	Pass
NVNT	n20	2412	Ant1	2386.5	-39.56	-10	Pass
NVNT	n20	2412	Ant1	2385.5	-40.55	-10	Pass
NVNT	n20	2412	Ant1	2384.5	-41.42	-10	Pass
NVNT	n20	2412	Ant1	2383.5	-42.31	-10	Pass
NVNT	n20	2412	Ant1	2383.237	-41.63	-10	Pass
NVNT	n20	2412	Ant1	2382.237	-42.68	-20	Pass
NVNT	n20	2412	Ant1	2381.237	-42.63	-20	Pass
NVNT	n20	2412	Ant1	2380.237	-42.3	-20	Pass
NVNT	n20	2412	Ant1	2379.237	-44.64	-20	Pass
NVNT	n20	2412	Ant1	2378.237	-44.38	-20	Pass
NVNT	n20	2412	Ant1	2377.237	-44.61	-20	Pass
NVNT	n20	2412	Ant1	2376.237	-46.18	-20	Pass
NVNT	n20	2412	Ant1	2375.237	-46.67	-20	Pass
NVNT	n20	2412	Ant1	2374.237	-47.12	-20	Pass
NVNT	n20	2412	Ant1	2373.237	-47.36	-20	Pass
NVNT	n20	2412	Ant1	2372.237	-47.46	-20	Pass
NVNT	n20	2412	Ant1	2371.237	-48.01	-20	Pass
NVNT	n20	2412	Ant1	2370.237	-47.91	-20	Pass
NVNT	n20	2412	Ant1	2369.237	-48.56	-20	Pass
NVNT	n20	2412	Ant1	2368.237	-49.94	-20	Pass
NVNT	n20	2412	Ant1	2367.237	-50.09	-20	Pass
NVNT	n20	2412	Ant1	2366.237	-50.18	-20	Pass
NVNT	n20	2412	Ant1	2365.974	-50.33	-20	Pass
NVNT	n20	2472	Ant1	2484	-31.76	-10	Pass
NVNT	n20	2472	Ant1	2485	-34.18	-10	Pass

NVNT	n20	2472	Ant1	2486	-34.4	-10	Pass
NVNT	n20	2472	Ant1	2487	-36.53	-10	Pass
NVNT	n20	2472	Ant1	2488	-36.32	-10	Pass
NVNT	n20	2472	Ant1	2489	-35.62	-10	Pass
NVNT	n20	2472	Ant1	2490	-37.68	-10	Pass
NVNT	n20	2472	Ant1	2491	-38.9	-10	Pass
NVNT	n20	2472	Ant1	2492	-38.98	-10	Pass
NVNT	n20	2472	Ant1	2493	-41.81	-10	Pass
NVNT	n20	2472	Ant1	2494	-41.84	-10	Pass
NVNT	n20	2472	Ant1	2495	-43.19	-10	Pass
NVNT	n20	2472	Ant1	2496	-43.43	-10	Pass
NVNT	n20	2472	Ant1	2497	-44.11	-10	Pass
NVNT	n20	2472	Ant1	2498	-42.89	-10	Pass
NVNT	n20	2472	Ant1	2499	-45.32	-10	Pass
NVNT	n20	2472	Ant1	2500	-45.5	-10	Pass
NVNT	n20	2472	Ant1	2500.303	-46.22	-10	Pass
NVNT	n20	2472	Ant1	2501.303	-46.73	-20	Pass
NVNT	n20	2472	Ant1	2502.303	-47.22	-20	Pass
NVNT	n20	2472	Ant1	2503.303	-47.35	-20	Pass
NVNT	n20	2472	Ant1	2504.303	-48.47	-20	Pass
NVNT	n20	2472	Ant1	2505.303	-49.21	-20	Pass
NVNT	n20	2472	Ant1	2506.303	-49.62	-20	Pass
NVNT	n20	2472	Ant1	2507.303	-50.02	-20	Pass
NVNT	n20	2472	Ant1	2508.303	-49.77	-20	Pass
NVNT	n20	2472	Ant1	2509.303	-50.44	-20	Pass
NVNT	n20	2472	Ant1	2510.303	-50.14	-20	Pass
NVNT	n20	2472	Ant1	2511.303	-50.78	-20	Pass
NVNT	n20	2472	Ant1	2512.303	-50.36	-20	Pass
NVNT	n20	2472	Ant1	2513.303	-51.05	-20	Pass
NVNT	n20	2472	Ant1	2514.303	-51.18	-20	Pass
NVNT	n20	2472	Ant1	2515.303	-51.29	-20	Pass
NVNT	n20	2472	Ant1	2516.303	-51.38	-20	Pass
NVNT	n20	2472	Ant1	2517.303	-51.47	-20	Pass
NVNT	n20	2472	Ant1	2517.606	-51.48	-20	Pass

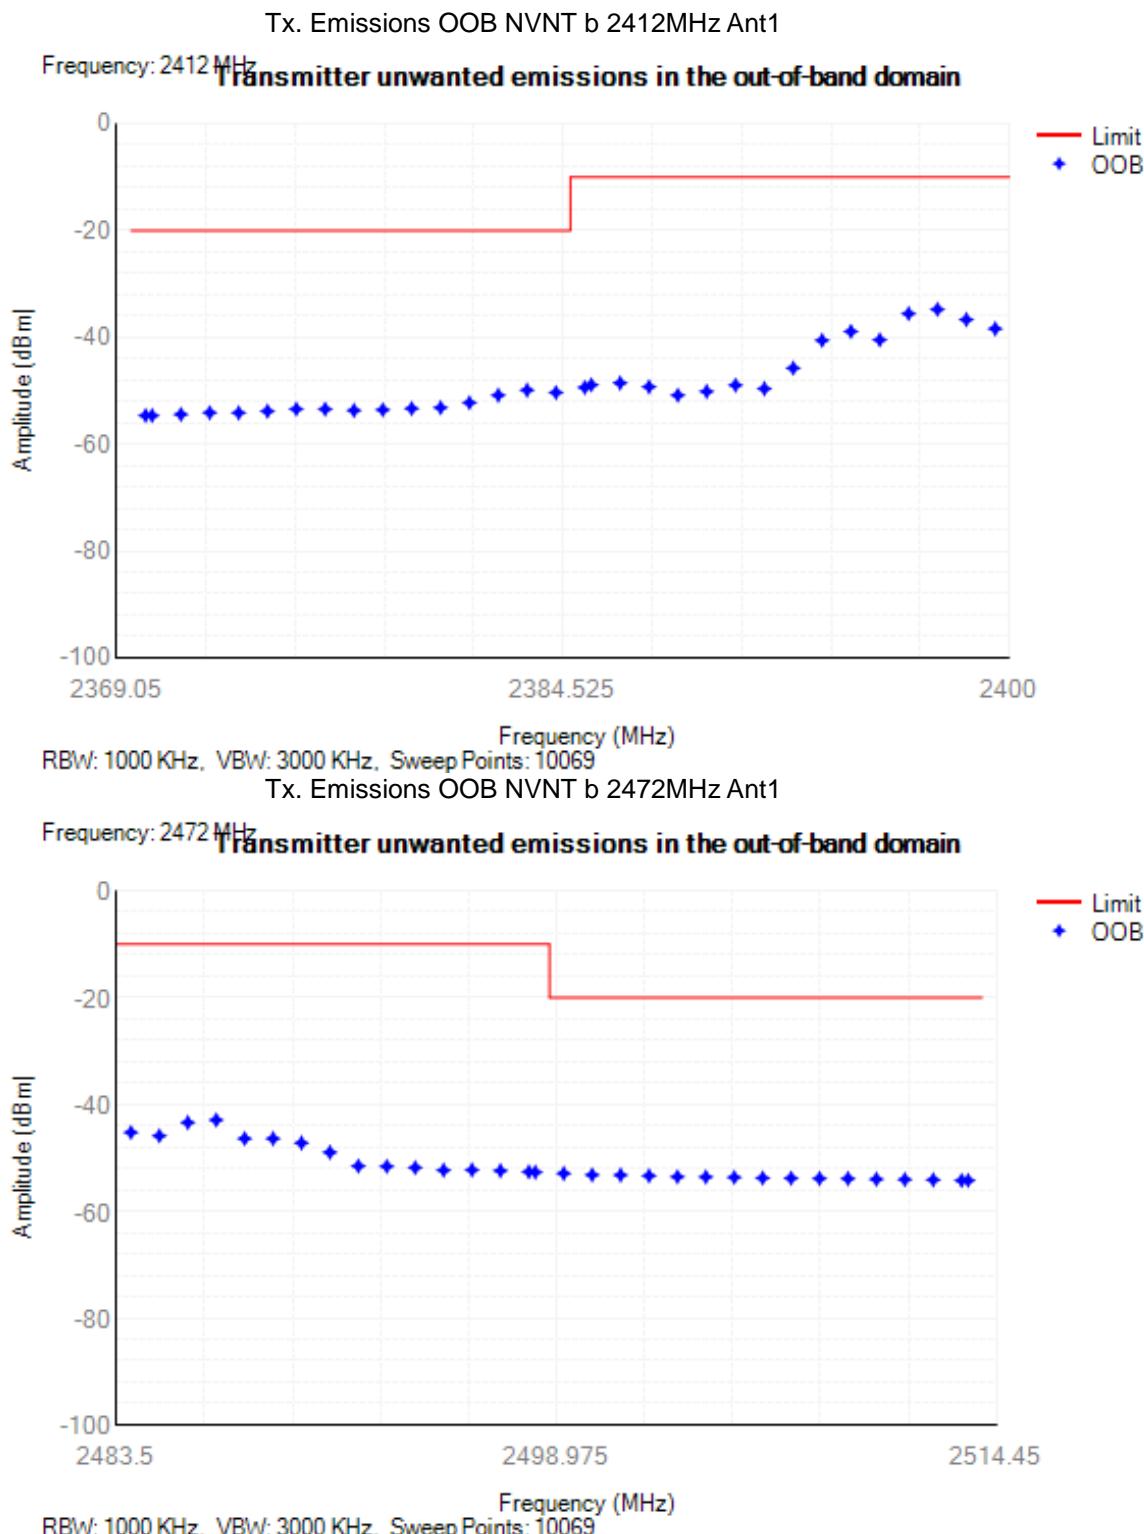

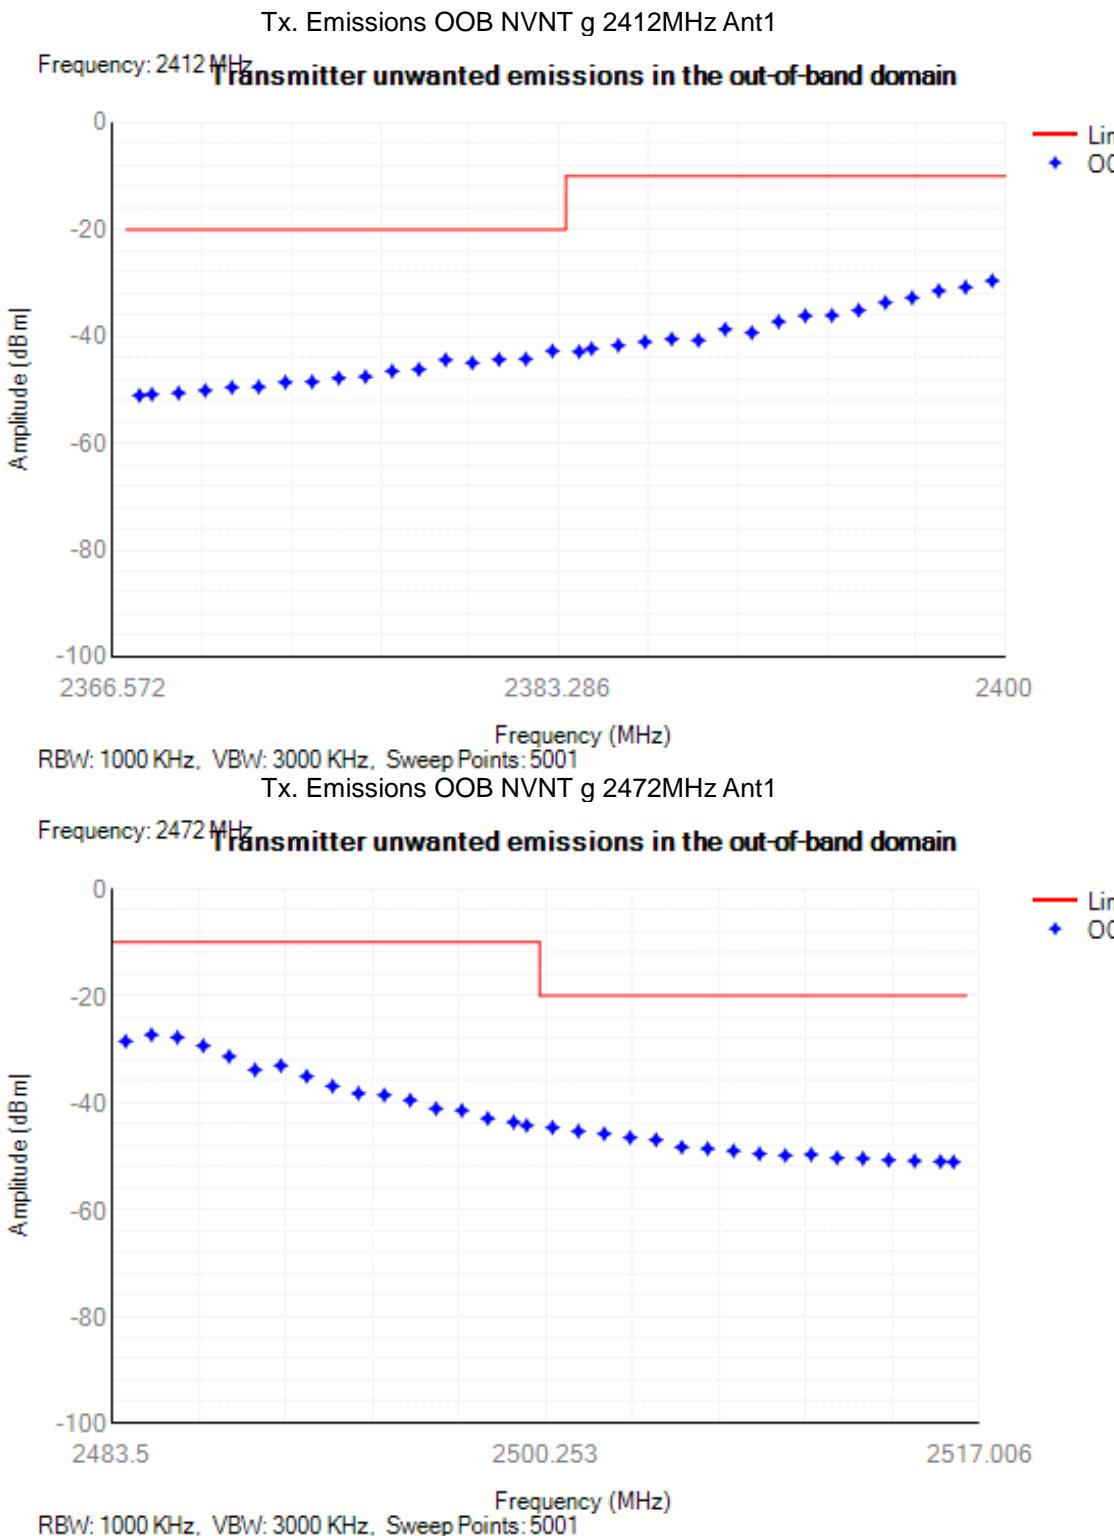

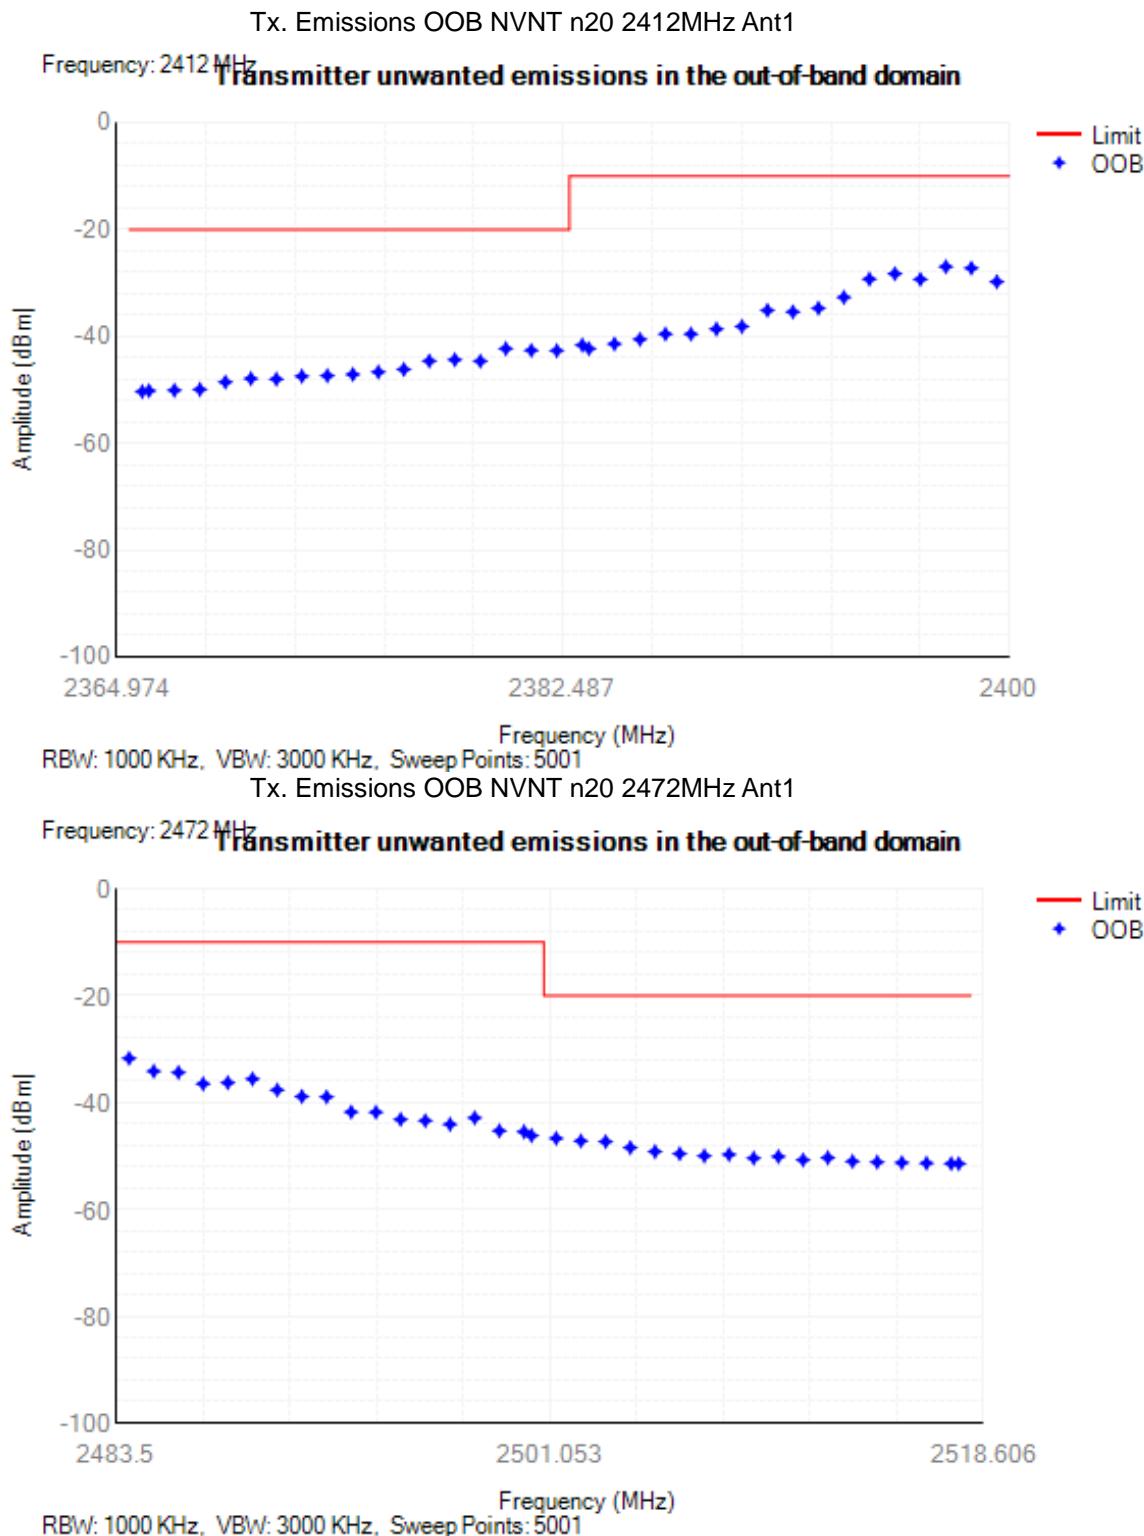

8. Transmitter unwanted emissions in the spurious domain

8.1. Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in following table .

Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

8.2. Test Procedure

Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.9.

8.3. Test Result

Test Mode: IEEE 802.11b Tx in CH1 2412MHz					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit (dBm)	Margin (dB)	Conclusion
245.79	H	-53.69	-36	-17.69	Pass
486.00	H	-60.60	-54	-6.60	Pass
4824.24	H	-40.20	-30	-10.20	Pass
7236.18	H	-45.38	-30	-15.38	Pass
272.86	V	-59.48	-36	-23.48	Pass
504.51	V	-62.18	-54	-8.18	Pass
4824.07	V	-45.25	-30	-15.25	Pass
7235.98	V	-48.64	-30	-18.64	Pass
Test Mode: IEEE 802.11b Tx in CH13 2472MHz					
238.99	H	-59.57	-36	-23.57	Pass
501.93	H	-65.49	-54	-11.49	Pass
4944.09	H	-41.83	-30	-11.83	Pass
7416.10	H	-43.16	-30	-13.16	Pass
269.17	V	-57.01	-36	-21.01	Pass
507.42	V	-60.05	-54	-6.05	Pass
4944.03	V	-46.93	-30	-16.93	Pass
7415.89	V	-48.07	-30	-18.07	Pass

Test Mode: IEEE 802.11g Tx in CH1 2412MHz					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit (dBm)	Margin (dB)	Conclusion
248.88	H	-56.91	-36	-20.91	Pass
495.08	H	-64.70	-54	-10.70	Pass
4824.02	H	-59.31	-30	-29.31	Pass
7235.95	H	-59.32	-30	-29.32	Pass
272.16	V	-57.19	-36	-21.19	Pass
501.51	V	-62.31	-54	-8.31	Pass
4824.05	V	-57.15	-30	-27.15	Pass
7236.00	V	-55.31	-30	-25.31	Pass
Test Mode: IEEE 802.11g Tx in CH13 2472MHz					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit (dBm)	Margin (dB)	Conclusion
245.41	H	-65.96	-36	-29.96	Pass
484.77	H	-66.13	-54	-12.13	Pass
4944.07	H	-55.02	-30	-25.02	Pass
7415.94	H	-60.62	-30	-30.62	Pass
275.19	V	-59.55	-36	-23.55	Pass
514.48	V	-62.67	-54	-8.67	Pass
4944.02	V	-55.39	-30	-25.39	Pass
7415.98	V	-60.63	-30	-30.63	Pass

Test Mode: IEEE 802.11nHT20 Tx in CH1 2412MHz					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit (dBm)	Margin (dB)	Conclusion
251.26	H	-60.83	-36	-24.83	Pass
479.05	H	-63.02	-54	-9.02	Pass
4824.04	H	-40.69	-30	-10.69	Pass
7236.09	H	-39.50	-30	-9.50	Pass
276.53	V	-54.24	-36	-18.24	Pass
502.34	V	-59.68	-54	-5.68	Pass
4824.00	V	-43.58	-30	-13.58	Pass
7236.00	V	-47.44	-30	-17.44	Pass
Test Mode: IEEE 802.11nHT20 Tx in CH13 2472MHz					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit (dBm)	Margin (dB)	Conclusion
248.01	H	-61.06	-36	-25.06	Pass
496.34	H	-67.07	-54	-13.07	Pass
4944.05	H	-45.52	-30	-15.52	Pass
7415.96	H	-40.92	-30	-10.92	Pass
272.71	V	-57.45	-36	-21.45	Pass
499.68	V	-59.98	-54	-5.98	Pass
4944.07	V	-41.37	-30	-11.37	Pass
7415.98	V	-47.41	-30	-17.41	Pass

9. Receiver Spurious emissions

9.1. Limit

The spurious emissions of the receiver shall not exceed the values given in following table .

Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
30 MHz to 1GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz

9.2. Test Procedure

Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.10.

9.3. Test Result

Test Mode: IEEE 802.11b Rx in CH1 2412MHz					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit (dBm)	Margin (dB)	Conclusion
240.12	H	-63.15	-57	-6.15	Pass
587.43	H	-68.38	-57	-11.38	Pass
2013.76	H	-59.37	-47	-12.37	Pass
2396.32	H	-61.86	-47	-14.86	Pass
222.72	V	-64.80	-57	-7.80	Pass
597.87	V	-63.43	-57	-6.43	Pass
2019.29	V	-70.42	-47	-23.42	Pass
2392.84	V	-58.37	-47	-11.37	Pass
Test Mode: IEEE 802.11b Rx in CH13 2472MHz					
247.38	H	-67.12	-57	-10.12	Pass
596.89	H	-68.90	-57	-11.90	Pass
2022.55	H	-54.36	-47	-7.36	Pass
2409.56	H	-57.09	-47	-10.09	Pass
212.12	V	-64.32	-57	-7.32	Pass
618.73	V	-69.17	-57	-12.17	Pass
2031.58	V	-66.83	-47	-19.83	Pass
2413.06	V	-59.39	-47	-12.39	Pass

Remark: This Report only show the test plots of the worst case (802.11b) .

10. Receiver Blocking

10.1. Limit

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 14, table 15 or table 16.

Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log10(OCBW)) or -68 dBm whichever is less (see note 2)	2380 2504		
(-139 dBm + 10 × log10(OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674	-34	CW

NOTE 1: OCBW is in Hz.
 NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 26 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.
 NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 20 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.
 NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Table 15: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log10(OCBW) + 10 dB) or (-74+ 10 dB) dBm whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW


NOTE 1: OCBW is in Hz.
 NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 26 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.
 NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Table 16: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log10(OCBW) + 20 dB) or (-74+ 20 dB) dBm whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.
 NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 30 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.
 NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

10.2. Test Setup

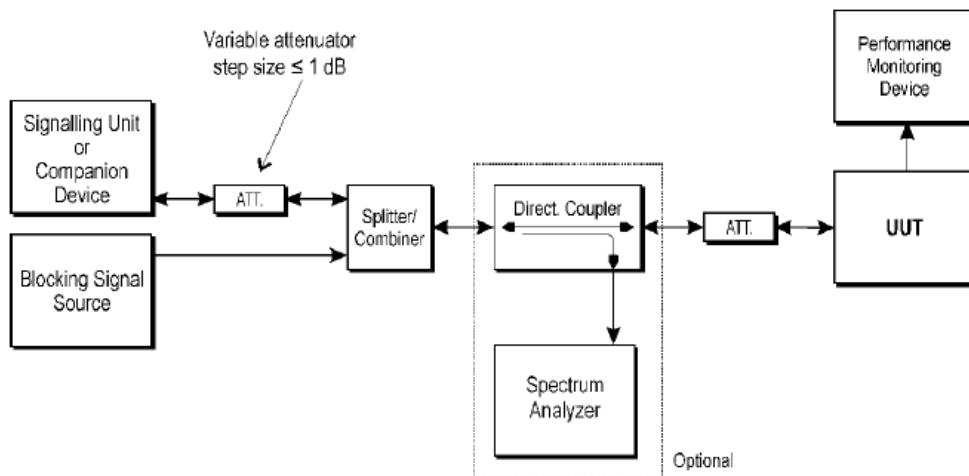

10.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2:2019 Clause 5.4.11.

10.4. Test Result

Wanted signal mean power from companion device (dBm)	Channel frequency (MHz)	Blocking signal frequency (MHz)	Blocking signal power (dBm)	PER (%)	PER limit	
-68	2412	2380	-34	1.5	$\leq 10\%$	
	2412	2504		1.0	$\leq 10\%$	
-74	2412	2300	-34	1.8	$\leq 10\%$	
	2412	2330		1.6	$\leq 10\%$	
	2412	2360		0.9	$\leq 10\%$	
	2412	2524		1.4	$\leq 10\%$	
	2412	2584		1.0	$\leq 10\%$	
	2412	2674		1.0	$\leq 10\%$	
	2472	2380	-34	1.2	$\leq 10\%$	
	2472	2504		0.9	$\leq 10\%$	
-74	2472	2300	-34	1.7	$\leq 10\%$	
	2472	2330		1.3	$\leq 10\%$	
	2472	2360		1.0	$\leq 10\%$	
	2472	2524		1.1	$\leq 10\%$	
	2472	2584		0.9	$\leq 10\%$	
	2472	2674		1.0	$\leq 10\%$	
Test result: PASS						
Note: <ol style="list-style-type: none"> The equipment belongs to receiver category 1 and it shall be tested operating at lowest data transmitting speed, Lowest channel and highest channel. For 2380MHz,2504MHz: Wanted signal mean power(dBm)= $(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or (-68 dBm) whichever is less For all blocking signal frequency other than 2380MHz,2504MHz: Wanted signal mean power(dBm)= $(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or (-74 dBm) whichever is less When required blocking signals injected, communication link between the UUT and the associated companion device remains, and the performance still meet the minimum performance criterion PER$\leq 10\%$. 						

11. Geo-location capability

11.1. Definition

Geo-location capability is a feature of the equipment to determine its geographical location with the purpose to configure itself according to the regulatory requirements applicable at the geographical location where it operates.

The geo-location capability may be present in the equipment or in an external device (temporary) associated with the equipment operating at the same geographical location during the initial power up of the equipment. The geographical location may also be available in equipment already installed and operating at the same geographical location.

11.2. Requirements



The geographical location determined by the equipment shall not be accessible to the user.

11.3. Test Result

Not apply.

This requirement only applies to equipment with geo-location capability. And this product does not have the Geo-location capability, thus, not apply to this product.

12. Photos of test setup

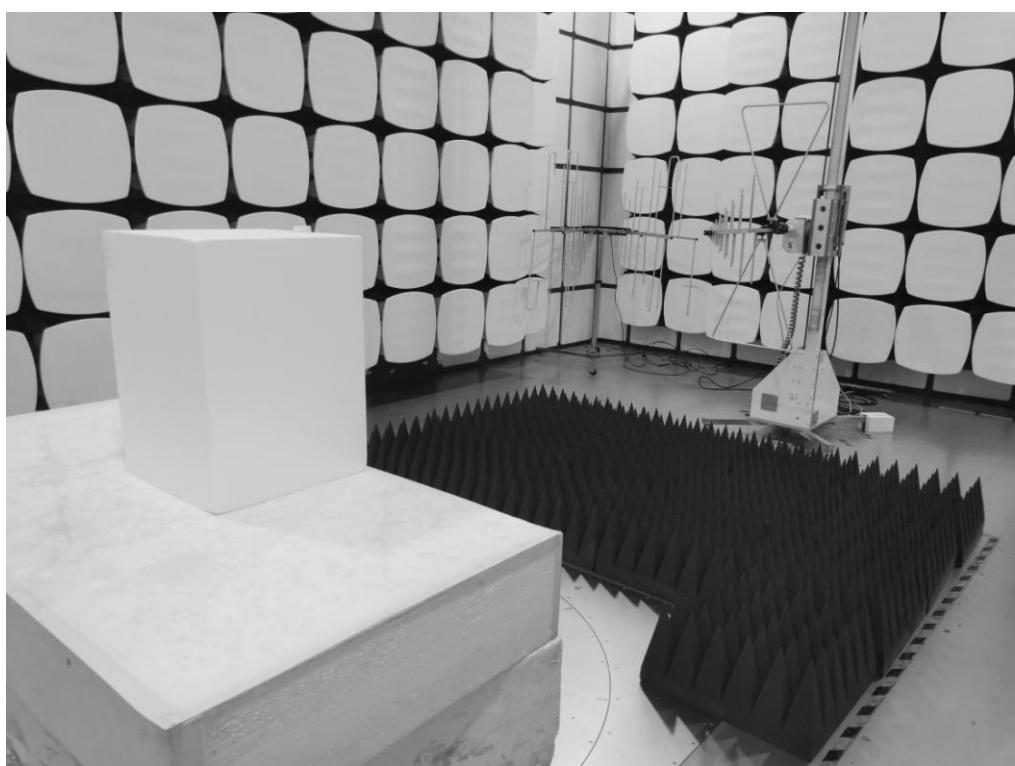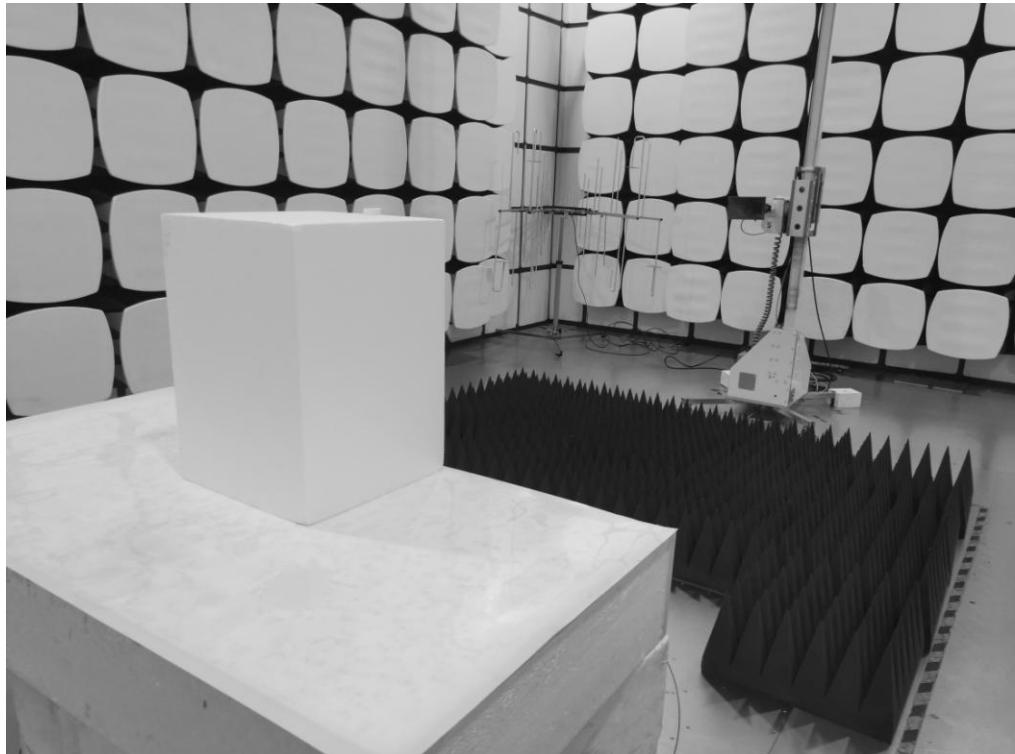

13. Photos of EUT

Please refer to report A2206159-C01-R04.

----- END OF REPORT -----